



Test Report

Product Name : Tablet: Wireless Tablet X860/X861;
Dongle: Wireless Tablet Receiver X860/X861
Model No. : Tablet: RCK-T07, RCK-T07S;
Dongle: RCK-T07R, RCK-T07RS

Applicant : WALTOP International Corp.

Address : 6F, No.19-1 Industry E.Rd.IV, Hsinchu Science
Park, Hsin-Chu 30077, Taiwan, R.O.C.

Date of Receipt : 2007/04/03
Issued Date : 2007/04/27
Report No. : 074H015-RFCEP14V02

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2007/04/27

Report No. : 074H015-RFCEP14V02



Product Name : Tablet: Wireless Tablet X860/X861;
 Dongle: Wireless Tablet Receiver X860/X861

Applicant : WALTOP International Corp.

Address : 6F,No.19-1 Industry E.Rd.IV,Hsinchu Science Park ,Hsin-Chu
 30077,Taiwan,R.O.C.

Manufacturer : WALTOP International Corp.

Model No. : Tablet: RCK-T07, RCK-T07S;
 Dongle: RCK-T07R, RCK-T07RS

Rated Voltage : AC 230 V / 50 Hz

EUT Voltage : AC 230 V / 50 Hz

Trade Name : WALTOP

Applicable Standard : ETSI EN 300 328: V1.6.1 (2004-11)

Test Result : Complied

The test results relate only to the samples tested.
 The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

Documented By : Sandy Chuang  
 (Sandy Chuang)

Tested By : Sheena Huang 
 (Sheena Huang)

Approved By : Roy Wang 
 (Roy Wang)

TABLE OF CONTENTS

| Description | Page |
|--|-----------|
| 1. General Information..... | 5 |
| 1.1. EUT Description | 5 |
| 1.2. Test Mode..... | 7 |
| 1.3. Tested System Details | 8 |
| 1.4. Configuration of tested System..... | 9 |
| 1.5. EUT Exercise Software..... | 11 |
| 1.6. Test Facility..... | 12 |
| 2. Effective isotropic radiated power | 13 |
| 2.1. Test Equipment..... | 13 |
| 2.2. Test Setup | 13 |
| 2.3. Test Condition..... | 14 |
| 2.4. Limits..... | 15 |
| 2.5. Test Procedure | 15 |
| 2.6. Test Specification..... | 15 |
| 2.7. Uncertainty | 15 |
| 2.8. Test Result..... | 16 |
| 3. Maximum spectral power density..... | 18 |
| 3.1. Test Equipment..... | 18 |
| 3.2. Test Setup | 18 |
| 3.3. Test Condition..... | 19 |
| 3.4. Limits..... | 19 |
| 3.5. Test Procedure | 19 |
| 3.6. Test Specification..... | 19 |
| 3.7. Uncertainty | 19 |
| 3.8. Test Result..... | 20 |
| 4. Frequency range..... | 22 |
| 4.1. Test Equipment..... | 22 |
| 4.2. Test Setup | 22 |
| 4.3. Test Condition..... | 23 |
| 4.4. Limits..... | 24 |
| 4.5. Test Procedure | 24 |
| 4.6. Test Specification..... | 24 |
| 4.7. Uncertainty | 24 |
| 4.8. Test Result..... | 25 |
| 5. Transmitter spurious emission..... | 27 |
| 5.1. Test Equipment..... | 27 |
| 5.2. Test Setup | 27 |
| 5.3. Test Condition..... | 28 |
| 5.4. Limits..... | 28 |
| 5.5. Test Procedure | 28 |
| 5.6. Test Specification..... | 28 |
| 5.7. Uncertainty | 28 |
| 5.8. Test Result..... | 29 |
| 5.9. Test Photo | 41 |

| | | |
|--------------------------|---|-----------|
| 6. | Receiver spurious emission | 45 |
| 6.1. | Test Equipment..... | 45 |
| 6.2. | Test Setup | 45 |
| 6.3. | Test Condition..... | 46 |
| 6.4. | Limits | 46 |
| 6.5. | Test Procedure | 46 |
| 6.6. | Test Specification..... | 46 |
| 6.7. | Uncertainty | 46 |
| 6.8. | Test Result..... | 47 |
| 6.9. | Test Photo | 59 |
| Attachement | | 63 |
| <input type="checkbox"/> | EUT Photograph..... | 63 |

1. General Information

1.1. EUT Description

| | |
|--------------------|--|
| Product Name | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 |
| Trade Name | WALTOP |
| Model No. | Tablet: RCK-T07, RCK-T07S; Dongle: RCK-T07R, RCK-T07RS |
| Frequency Range | 2402~2479MHz |
| Channel Number | 78 |
| Type of Modulation | Direct Sequence Spread Spectrum (DSSS) |
| Antenna Gain | -0.51dBi (Tablet) -3.67dBi (Dongle) |
| Channel Control | Auto |
| Antenna Type | Soldered on PCB |

| | |
|-----------|---|
| Component | |
| USB Cable | Shielded, 1.5m, two ferrite cores bonded. |

| Working Frequency of Each Channel | | | | | | | |
|-----------------------------------|-----------|------------|-----------|------------|-----------|------------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| Channel 01 | 2402 MHz | Channel 21 | 2422 MHz | Channel 41 | 2442 MHz | Channel 61 | 2462 MHz |
| Channel 02 | 2403 MHz | Channel 22 | 2423 MHz | Channel 42 | 2443 MHz | Channel 62 | 2463 MHz |
| Channel 03 | 2404 MHz | Channel 23 | 2424 MHz | Channel 43 | 2444 MHz | Channel 63 | 2464 MHz |
| Channel 04 | 2405 MHz | Channel 24 | 2425 MHz | Channel 44 | 2445 MHz | Channel 64 | 2465 MHz |
| Channel 05 | 2406 MHz | Channel 25 | 2426 MHz | Channel 45 | 2446 MHz | Channel 65 | 2466 MHz |
| Channel 06 | 2407 MHz | Channel 26 | 2427 MHz | Channel 46 | 2447 MHz | Channel 66 | 2467 MHz |
| Channel 07 | 2408 MHz | Channel 27 | 2428 MHz | Channel 47 | 2448 MHz | Channel 67 | 2468 MHz |
| Channel 08 | 2409 MHz | Channel 28 | 2429 MHz | Channel 48 | 2449 MHz | Channel 68 | 2469 MHz |
| Channel 09 | 2410 MHz | Channel 29 | 2430 MHz | Channel 49 | 2450 MHz | Channel 69 | 2470 MHz |
| Channel 10 | 2411 MHz | Channel 30 | 2431 MHz | Channel 50 | 2451 MHz | Channel 70 | 2471 MHz |
| Channel 11 | 2412 MHz | Channel 31 | 2432 MHz | Channel 51 | 2452 MHz | Channel 71 | 2472 MHz |
| Channel 12 | 2413 MHz | Channel 32 | 2433 MHz | Channel 52 | 2453 MHz | Channel 72 | 2473 MHz |
| Channel 13 | 2414 MHz | Channel 33 | 2434 MHz | Channel 53 | 2454 MHz | Channel 73 | 2474 MHz |
| Channel 14 | 2415 MHz | Channel 34 | 2435 MHz | Channel 54 | 2455 MHz | Channel 74 | 2475 MHz |
| Channel 15 | 2416 MHz | Channel 35 | 2436 MHz | Channel 55 | 2456 MHz | Channel 75 | 2476 MHz |
| Channel 16 | 2417 MHz | Channel 36 | 2437 MHz | Channel 56 | 2457 MHz | Channel 76 | 2477 MHz |
| Channel 17 | 2418 MHz | Channel 37 | 2438 MHz | Channel 57 | 2458 MHz | Channel 77 | 2478 MHz |
| Channel 18 | 2419 MHz | Channel 38 | 2439 MHz | Channel 58 | 2459 MHz | Channel 78 | 2479 MHz |
| Channel 19 | 2420 MHz | Channel 39 | 2440 MHz | Channel 59 | 2460 MHz | | |
| Channel 20 | 2421 MHz | Channel 40 | 2441 MHz | Channel 60 | 2461 MHz | | |

Note:

1. This device is a Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 a 2.4GHz receiving function, and 2.4GHz transmitting function.
2. Regards to the frequency band operations; three channels were selected to perform the test, and then show on this report.
3. This device is a composite device in accordance with ETSI regulations. The EMC was measured and made a test report that the report number is 074H015-RFCEP02V01.

1.2. Test Mode

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| | |
|---------------------------|--|
| Pre-Test Mode | |
| Mode 1: Transmit (Tablet) | |
| Mode 2: Transmit (Dongle) | |
| Mode 3: Receive (Tablet) | |
| Mode 4: Receive (Dongle) | |
| Final Test Mode | |
| TX | Mode 1: Transmit (Tablet) Mode 2: Transmit (Dongle) |
| RX | Mode 3: Receive (Tablet) Mode 4: Receive (Dongle) |

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Test Mode | | | | | |
|-----------|----------|--------------|-----------|-----------------|--------------------|
| Product | | Manufacturer | Model No. | Serial No. | Power Cord |
| 1 | PC | HP | DTPC27 | SG21200950 | Non-shielded, 1.8m |
| 2 | Monitor | CHI MEI | A170E1-09 | 3UC120955SA1249 | Non-shielded, 1.8m |
| 3 | Mouse | Logitech | M-SBF83 | HCA52200288 | -- |
| 4 | Keyboard | ACER | 6311-TW2C | N/A | -- |

1.4. Configuration of tested System

| Test Mode | Mode 1: Transmit (Tablet) Mode 3: Receive (Tablet) | |
|--|---|---|
| Connection Diagram | | |
| <pre> graph TD PC["PC (1)"] --- D --- Monitor["Monitor(2)"] PC --- A --- Doagle["Doagle (EUT)"] PC --- A --- Tablet["Tablet (EUT)"] PC --- B --- Mouse["Mouse(3)"] PC --- C --- Keyboard["Keyboard(4)"] </pre> | | |
| Signal Cable Type | Signal cable Description | |
| A | USB Cable | Shielded, 1.8m, two ferrite cores bonded. |
| B | Mouse Cable | Shielded, 1.8m |
| C | Keyboard Cable | Shielded, 1.8m |
| D | VGA Cable | Shielded, 1.8m, two ferrite cores bonded. |

| Test Mode | | Mode 2: Transmit (Dongle) Mode 4: Receive (Dongle) | |
|---|----------------|---|--|
| Connection Diagram | | | |
| <p>The diagram shows a central PC (1) connected to four peripherals: Monitor(2) via cable D, Doagle (EUT) via cable A, Keyboard(4) via cable C, and Mouse(3) via cable B. A Tablet (EUT) is shown separately below the PC area.</p> | | | |
| Signal Cable Type | | Signal cable Description | |
| A | USB Cable | Shielded, 1.8m, two ferrite cores bonded. | |
| B | Mouse Cable | Shielded, 1.8m | |
| C | Keyboard Cable | Shielded, 1.8m | |
| D | VGA Cable | Shielded, 1.8m, two ferrite cores bonded. | |

1.5. EUT Exercise Software

| | |
|---|---|
| 1 | Setup the EUT and simulators as shown on 1.4 |
| 2 | Turn on the power of all equipment. |
| 3 | Notebook PC reads data from disk. |
| 4 | Data will be transmitting through EUT. |
| 5 | The transmitting status will be shown on the monitor. |
| 6 | Repeat the above procedure (4) to (5). |
| 7 | Data will be receiving through EUT. |
| 8 | The receiving status will be shown on the monitor. |
| 9 | Repeat the above procedure (7) to (8). |

1.6. Test Facility

Ambient conditions in the laboratory:

| Items | Test Item | Required (IEC 68-1) | Actual |
|----------------------------|---|---------------------|----------|
| Temperature (°C) | ETSI EN 300 328 Effective Radiated Power | 15 - 35 | 20 |
| Humidity (%RH) | | 20 - 75 | 58 |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 |
| Temperature (°C) | ETSI EN 300 328 Maximum Spectral Power Density | 15 - 35 | 20 |
| Humidity (%RH) | | 20 - 75 | 59 |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 |
| Temperature (°C) | ETSI EN 300 328 Frequency Range | 15 - 35 | 20 |
| Humidity (%RH) | | 20 - 75 | 57 |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 |
| Temperature (°C) | ETSI EN 300 328 Transmitter Spurious Emissions | 15 - 35 | 25 |
| Humidity (%RH) | | 20 - 75 | 60 |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 |
| Temperature (°C) | ETSI EN 300 328 Receiver Spurious Emissions | 15 - 35 | 25 |
| Humidity (%RH) | | 20 - 75 | 60 |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 |

Site Description:

Accredited by NVLAP
 NVLAP Lab Code: 200347-0
 Effective through: September 30, 2006



Accredited by CNLA
 Accreditation Number: 1313
 Effective through: September 27, 2007



1313

February 23, 1999 Accreditation on DNV
 Statement No. : 413-99-LAB11

ILAC MRA



December 28, 2005 Accreditation on TUV Rheinland
 Certificate No.: 10011438-2-2005



December 14, 2005 Accreditation on Nemko
 Certificate No.: ELA 165



Site Name: Quietek Corporation

Site Address: No.75-1, Wang-Yeh Valley, Yung-Hsing,
 Chiung-Lin, Hsin-Chu County,
 Taiwan, R.O.C.
 TEL : 886-3-5928858 / FAX : 886-3-5928859
 E-Mail : service@quietek.com

2. Effective isotropic radiated power


2.1. Test Equipment

The following test equipment are used during the test:

| Item | Equipment | Manufacturer | Model No. / Serial No. | Last Cal. |
|------|---|--------------|------------------------|------------|
| 1 | Spectrum Analyzer | R & S | FSP / 100561 | Mar., 2007 |
| 2 | STANDARD TEMPERATURE & HUMIDITY CHAMBER | WIT | TH-1S-B / 108210 | Nov., 2006 |
| 3 | No.1 OATS | | | Sep., 2006 |

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

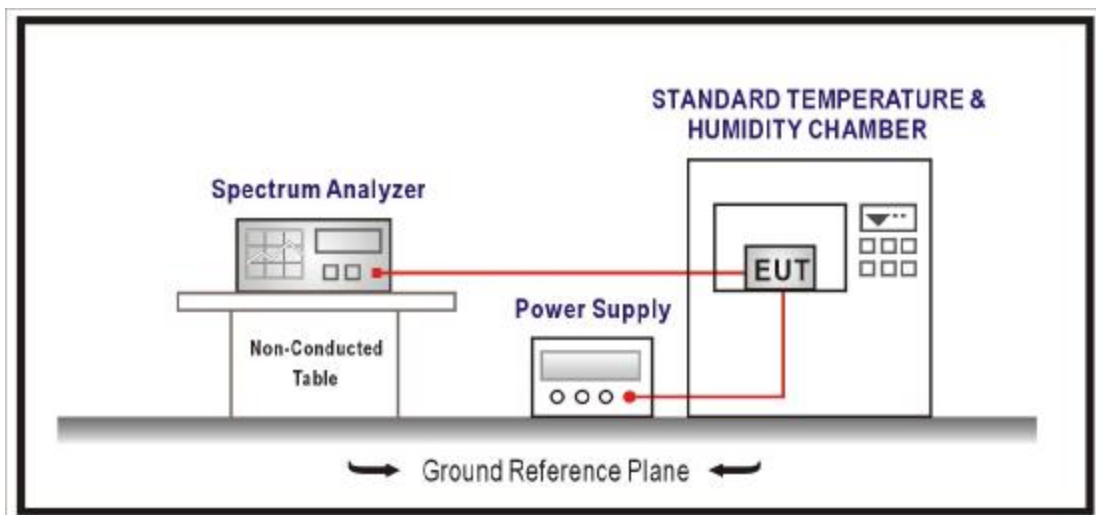

2.3. Test Condition

∅ Normal test conditions

— Normal temperature and humidity :

The normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges :

- temperature : +15°C to +35°C
- relative humidity : 20 % to 75 %

— Normal power source :

Main voltage :

The normal test voltages for equipment to be connected to the mains shall be the nominal mains voltage. For purpose of the present document, the nominal voltage shall be the voltage(s) for which the equipment was designed.

The frequency of the test power source corresponding to the AC mains shall be between 49 Hz and 51 Hz.

Lead-acid battery power sources used on vehicles :

When radio equipment is intended for operation from the usual, alternator fed lead-acid battery power sources used on vehicles, the normal test voltages shall be 1.1 times the nominal voltage of the battery (6V, 12 V, etc.).

∅ Extreme test conditions

— Extreme temperature ranges :

For tests extreme temperatures, measurements shall be made in accordance with the procedures specified, at the upper and lower temperatures of the ranges as follows :

- temperature : -20°C to +55°C

Where the manufacturer's stated operating range does not include the range of -20°C to +55°C, the equipment shall be tested over the following temperature ranges :

- a) 0°C to +35°C for equipment intended for indoor use only, or intended for use in areas where the temperature is controlled within this range ;
- b) over the extremes of the operating temperature range(s) of the stated combination(s) or host equipment(s) in case of plug-in radio devices.

— Extreme test source voltages :

Main voltage :

The extreme test voltages for equipment to be connected to an ac mains source shall be the nominal mains voltage 10 %.

Lead-acid battery power sources used on vehicles :

When radio equipment is intended for operation from the usual type of alternator fed lead-acid battery power sources used on vehicles, the extreme test voltages shall be 1.3 and 0.9 times the nominal voltage of the battery (6V, 12 V, etc.).

2.4. Limits

The effective radiated power is defined as the total power of the transmitter.

The effective radiated power shall be equal to or less than -10 dBW (100 mW) e.i.r.p. This limit shall apply for any combination of power level and intended antenna assembly.

2.5. Test Procedure

The following method of measurement shall apply to both conducted and radiated measurements.

The measurement shall be performed using normal operation of the equipment with modulation, using the test data sequence, applied. Using a suitable means, the output of the transmitter shall be coupled to a diode detector; the output of the diode detector shall be connected to the vertical channel of an oscilloscope; the combination of the diode detector and the oscilloscope shall be capable of faithfully reproducing the envelope peaks and the duty cycle of the transmitter output signal.

The measurement shall be repeated at the lowest, the middle, and highest frequency of the stated frequency range.

FHSS equipment shall be made to hop continuously to each of these three frequencies separately.

2.6. Test Specification

According to ETSI EN 300 328: V1.6.1 (2004-11)

2.7. Uncertainty

The measurement uncertainty is defined as $\pm 1.27\text{dB}$

2.8. Test Result

| | | | |
|--------------|---|-----------|-----------|
| Product | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | | |
| Test Item | Effective isotropic radiated power | | |
| Test Mode | Mode 1: Transmit (Tablet) | | |
| Date of Test | 2007/04/14 | Test Site | No.1 OATS |

| Antenna Gain: -0.51dBi | | | | | | |
|------------------------|-------------|---------|-----------------|---------------------|----------------------|-------------|
| Detector: Average | | | | | | |
| Test Conditions | | Channel | Frequency (MHz) | Reading Level (dBm) | Emission Level (dBm) | Limit (dBm) |
| Tnom (25) °C | Vnom (230)V | 01 | 2402 | 10.37 | 9.83 | 20 |
| | | 39 | 2440 | 10.11 | 9.60 | 20 |
| | | 78 | 2479 | 10.21 | 9.70 | 20 |
| Tmax (35) °C | Vmax (253)V | 01 | 2402 | 10.05 | 9.54 | 20 |
| | | 39 | 2440 | 10.24 | 9.73 | 20 |
| | | 78 | 2479 | 10.36 | 9.85 | 20 |
| Tmax (35) °C | Vmin (207)V | 01 | 2402 | 10.77 | 10.26 | 20 |
| | | 39 | 2440 | 10.02 | 9.51 | 20 |
| | | 78 | 2479 | 10.41 | 9.90 | 20 |
| Tmin (0) °C | Vmax (253)V | 01 | 2402 | 10.37 | 9.86 | 20 |
| | | 39 | 2440 | 10.04 | 9.53 | 20 |
| | | 78 | 2479 | 10.11 | 9.60 | 20 |
| Tmin (0) °C | Vmin (207)V | 01 | 2402 | 10.62 | 10.11 | 20 |
| | | 39 | 2440 | 10.13 | 9.62 | 20 |
| | | 78 | 2479 | 10.06 | 9.55 | 20 |

* Emission Level = Reading Level + Antenna Gain + 10 log (1/Duty Cycle)

| | |
|-------------|------|
| Test Result | PASS |
|-------------|------|

Remark:

- Channel 01 Lowest frequency at the appropriate spurious emission level
- Channel 39 Middle frequency at the appropriate spurious emission level
- Channel 78 Highest frequency at the appropriate spurious emission level

| | | | |
|--------------|---|-----------|-----------|
| Product | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | | |
| Test Item | Effective radiated power | | |
| Test Mode | Mode 2: Transmit (Dongle) | | |
| Date of Test | 2007/04/14 | Test Site | No.1 OATS |

| Antenna Gain: -3.67dBi | | | | | | |
|------------------------|-------------|---------|-----------------|---------------------|----------------------|-------------|
| Detector: Average | | | | | | |
| Test Conditions | | Channel | Frequency (MHz) | Reading Level (dBm) | Emission Level (dBm) | Limit (dBm) |
| Tnom (25) °C | Vnom (230)V | 01 | 2402 | -3.72 | -7.39 | 20 |
| | | 39 | 2440 | -3.70 | -7.37 | 20 |
| | | 78 | 2479 | -3.53 | -7.20 | 20 |
| Tmax (35) °C | Vmax (253)V | 01 | 2402 | -4.09 | -7.76 | 20 |
| | | 39 | 2440 | -4.86 | -8.53 | 20 |
| | | 78 | 2479 | -4.84 | -8.51 | 20 |
| Tmax (35) °C | Vmin (207)V | 01 | 2402 | -5.42 | -9.09 | 20 |
| | | 39 | 2440 | -4.21 | -7.88 | 20 |
| | | 78 | 2479 | -5.26 | -8.93 | 20 |
| Tmin (0) °C | Vmax (253)V | 01 | 2402 | -5.78 | -9.45 | 20 |
| | | 39 | 2440 | -5.98 | -9.65 | 20 |
| | | 78 | 2479 | -5.33 | -9.00 | 20 |
| Tmin (0) °C | Vmin (207)V | 01 | 2402 | -7.43 | -11.1 | 20 |
| | | 39 | 2440 | -6.60 | -10.27 | 20 |
| | | 78 | 2479 | -6.18 | -9.85 | 20 |

* Emission Level = Reading Level + Antenna Gain + 10 log (1/Duty Cycle)

| | |
|-------------|------|
| Test Result | PASS |
|-------------|------|

Remark:

- Channel 01 Lowest frequency at the appropriate spurious emission level
- Channel 39 Middle frequency at the appropriate spurious emission level
- Channel 78 Highest frequency at the appropriate spurious emission level

3. Maximum spectral power density


3.1. Test Equipment

The following test equipment are used during the test:

| Item | Equipment | Manufacturer | Model No. / Serial No. | Last Cal. |
|------|-------------------|--------------|------------------------|------------|
| 1 | Spectrum Analyzer | R & S | FSP / 100561 | Mar., 2007 |
| 2 | Power Meter | Agilent | E4416A / GB41291630 | May, 2007 |
| 3 | Power Sensor | Agilent | E9323A / US40411166 | May, 2007 |
| 4 | No.1 OATS | | | Sep., 2006 |

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

3.2. Test Setup

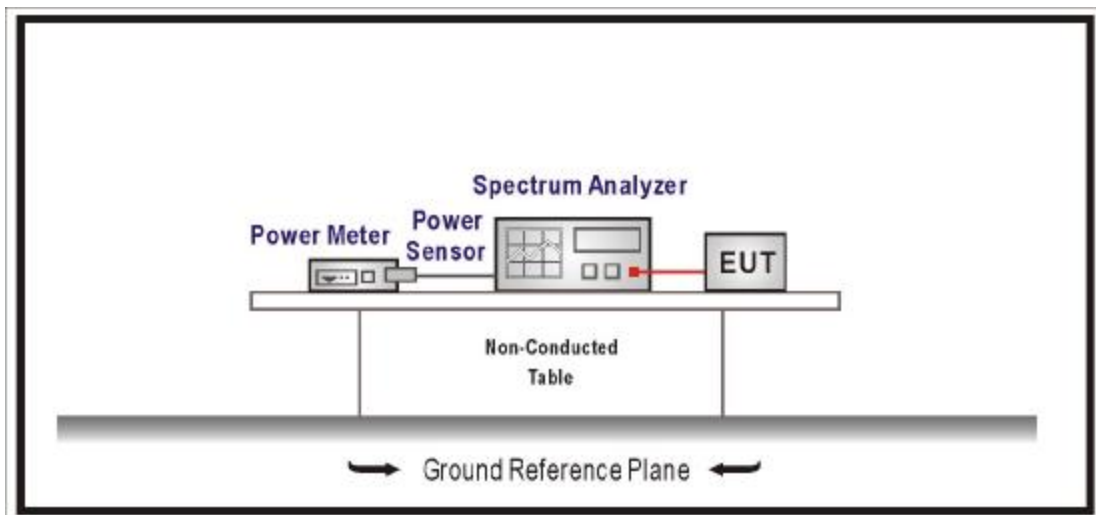

3.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

3.4. Limits

The maximum spectral power density is defined as the highest level of power in Watts per Hertz generated by the transmitter within the power envelope.

For equipment using FHSS modulation, the maximum spectral power density shall be limited to -10 dBW (100 mW) per 100 kHz e.i.r.p. For equipment using other types of modulation, the maximum spectral power density shall be limited to -20 dBW(10 mW) per MHz e.i.r.p.

3.5. Test Procedure

The maximum spectral power density shall be determined using a spectrum analyzer of adequate bandwidth for the type of modulation being used in combination with an RF power meter.

Connect an RF power meter to the IF output of the spectrum analyzer and correct its reading using a known reference source, e.g. a signal generator.

The above procedure shall be repeated for each of the three frequencies identified by the procedure given in limit (subclause 5.7.2.2.)

Where the spectrum analyzer bandwidth is non-Gaussian, a suitable correction factor shall be determined and applied.

Where a spectrum analyzer is equipped with a facility to measure power density, this facility may be used instead of the above procedure.

3.6. Test Specification

According to ETSI EN 300 328: V1.6.1 (2004-11)

3.7. Uncertainty

The measurement uncertainty is defined as $\pm 1.27\text{dB}$.

3.8. Test Result

| | | | |
|--------------|---|-----------|-----------|
| Product | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | | |
| Test Item | Maximum Spectral Power Density | | |
| Test Mode | Mode 1: Transmit (Tablet) | | |
| Date of Test | 2007/04/13 | Test Site | No.1 OATS |

| Antenna Gain: -0.51dBi, Duty Cycle: 1 | | | | |
|---------------------------------------|-----------------|-------------------------|--------------------------|-----------------|
| Channel | Frequency (MHz) | Reading Level (dBm/MHz) | Emission Level (dBm/MHz) | Limit (dBm/MHz) |
| 01 | 2402 | -5.48 | -5.99 | 10 |
| 39 | 2440 | -5.75 | -6.26 | 10 |
| 78 | 2479 | -6.05 | -6.56 | 10 |

* Emission Level = Reading Level + Antenna Gain + 10 log (1/Duty Cycle)

| | |
|-------------|------|
| Test Result | PASS |
|-------------|------|

Remark:

- Channel 01 Lowest frequency at the appropriate spurious emission level
- Channel 39 Middle frequency at the appropriate spurious emission level
- Channel 78 Highest frequency at the appropriate spurious emission level

| | | | |
|--------------|---|-----------|-----------|
| Product | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | | |
| Test Item | Maximum Spectral Power Density | | |
| Test Mode | Mode 2: Transmit (Dongle) | | |
| Date of Test | 2007/04/13 | Test Site | No.1 OATS |

| Antenna Gain: -3.67dBi, Duty Cycle: 1 | | | | |
|---------------------------------------|-----------------|-------------------------|--------------------------|-----------------|
| Channel | Frequency (MHz) | Reading Level (dBm/MHz) | Emission Level (dBm/MHz) | Limit (dBm/MHz) |
| 01 | 2402 | -10.25 | -13.92 | 10 |
| 39 | 2440 | -10.58 | -14.25 | 10 |
| 78 | 2479 | -11.62 | -15.29 | 10 |

* Emission Level = Reading Level + Antenna Gain + 10 log (1/Duty Cycle)

| | |
|-------------|------|
| Test Result | PASS |
|-------------|------|

Remark:

- Channel 01 Lowest frequency at the appropriate spurious emission level
- Channel 39 Middle frequency at the appropriate spurious emission level
- Channel 78 Highest frequency at the appropriate spurious emission level

4. Frequency range


4.1. Test Equipment

The following test equipment are used during the test:

| Item | Equipment | Manufacturer | Model No. / Serial No. | Last Cal. |
|------|---|--------------|------------------------|------------|
| 1 | Spectrum Analyzer | R & S | FSP / 100561 | Mar., 2007 |
| 2 | STANDARD TEMPERATURE & HUMIDITY CHAMBER | WIT | TH-1S-B / 108210 | Nov., 2006 |
| 3 | No.1 OATS | | | Sep., 2006 |

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

4.2. Test Setup

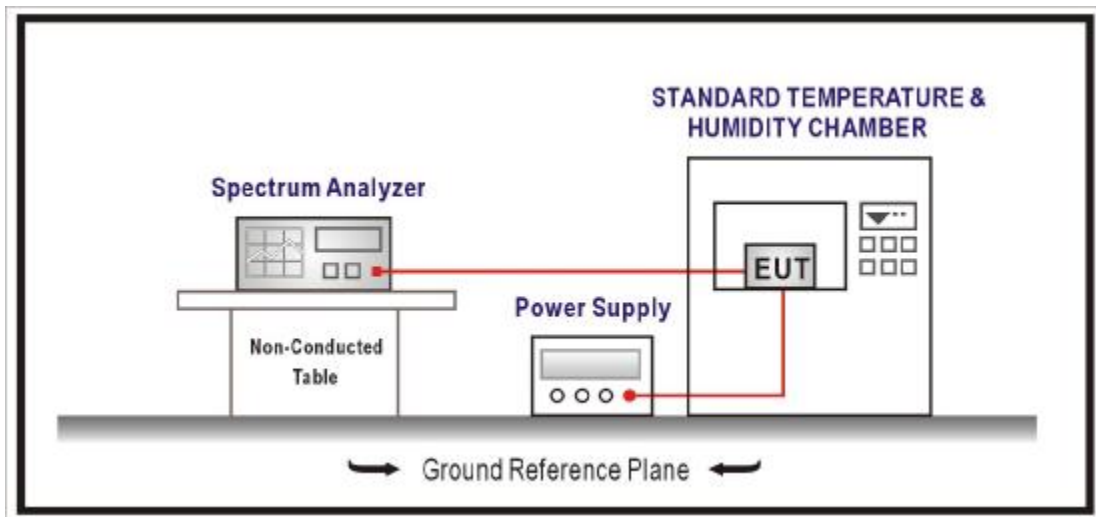

4.3. Test Condition

∅ Normal test conditions

— Normal temperature and humidity :

The normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges :

- temperature : +15°C to +35°C
- relative humidity : 20 % to 75 %

— Normal power source :

Main voltage :

The normal test voltages for equipment to be connected to the mains shall be the nominal mains voltage. For purpose of the present document, the nominal voltage shall be the voltage(s) for which the equipment was designed.

The frequency of the test power source corresponding to the AC mains shall be between 49 Hz and 51 Hz.

Lead-acid battery power sources used on vehicles :

When radio equipment is intended for operation from the usual, alternator fed lead-acid battery power sources used on vehicles, the normal test voltages shall be 1.1 times the nominal voltage of the battery (6V, 12 V, etc.).

∅ Extreme test conditions

— Extreme temperature ranges :

For tests extreme temperatures, measurements shall be made in accordance with the procedures specified, at the upper and lower temperatures of the ranges as follows :

- temperature : -20°C to +55°C

Where the manufacturer's stated operating range does not include the range of -20°C to +55°C, the equipment shall be tested over the following temperature ranges :

- c) 0°C to +35°C for equipment intended for indoor use only, or intended for use in areas where the temperature is controlled within this range ;
- d) over the extremes of the operating temperature range(s) of the stated combination(s) or host equipment(s) in case of plug-in radio devices.

— Extreme test source voltages :

Main voltage :

The extreme test voltages for equipment to be connected to an ac mains source shall be the nominal mains voltage 10 %.

Lead-acid battery power sources used on vehicles :

When radio equipment is intended for operation from the usual type of alternator fed lead-acid battery power sources used on vehicles, the extreme test voltages shall be 1.3 and 0.9 times the nominal voltage of the battery (6V, 12 V, etc.).

4.4. Limits

The frequency range of the equipment is determined by the lowest and highest frequencies occupied by the power envelope.

f_H is the highest frequency of the power envelope: it is the frequency furthest above the frequency of maximum power where the output power drops below the level of -80 dBm/Hz e.i.r.p. spectral power density (-30 dBm if measured in a 100 kHz bandwidth).

f_L is the lowest frequency of the power envelope; it is the frequency furthest below the frequency of maximum power where the output power drops below the level equivalent to -80 dBm/Hz e.i.r.p. spectral power density (or -30 dBm if measured in a 100 kHz bandwidth).

For a given operating frequency, the width of the power envelope is $(f_H - f_L)$. In equipment that allows adjustment or selection of difference operation frequencies, the power envelope takes up difference positions in the allowed band. The frequency range is determined by the lowest value of f_L and the highest value of f_H resulting from the adjustment of the equipment to the lowest and highest operating frequencies.

For all equipment the frequency range shall lie within the band 2.4GHz to 2.4835GHz ($f_L > 2.4\text{GHz}$ and $f_H < 2.4835\text{GHz}$).

4.5. Test Procedure

The measurement procedure shall be as follows:

- a) Place the spectrum analyzer in video averaging mode with a minimum of 50 sweeps selected and activate the transmitter with modulation applied. The RF emission of the equipment shall be displayed on the spectrum analyzer;
- b) Select lowest operating frequency of the equipment under test;
- c) Using the marker of the spectrum analyzer, find lowest frequency below the operating frequency at which spectral power density drops below the level given in limit (subclause 4.3.3.1);
- d) Select the highest operating frequency of the equipment under test;
- e) Find the highest frequency at which the spectral power density drops below the value given in limit (subclause 4.3.3.1);
- f) The difference between the frequencies measured in steps c) and e) is the frequency range.

4.6. Test Specification

According to ETSI EN 300 328: V1.6.1 (2004-11)

4.7. Uncertainty

The measurement uncertainty is defined as $\pm 100\text{k}$

4.8. Test Result

| | | | |
|--------------|---|-----------|-----------|
| Product | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | | |
| Test Item | Frequency range | | |
| Test Mode | Mode 1: Transmit (Tablet) | | |
| Date of Test | 2007/04/14 | Test Site | No.1 OATS |

| | | | |
|---------------------------------------|-------------|-----------------|---------|
| Antenna Gain: -0.51dBi, Duty Cycle: 1 | | | |
| Test Conditions | | Frequency (MHz) | |
| Tnom (25) °C | Vnom (230)V | F _L | 2401.50 |
| | | F _H | 2479.68 |
| Tmax (35) °C | Vmax (253)V | F _L | 2401.48 |
| | | F _H | 2479.68 |
| Tmax (35) °C | Vmin (207)V | F _L | 2401.50 |
| | | F _H | 2479.70 |
| Tmin (0) °C | Vmax (253)V | F _L | 2401.58 |
| | | F _H | 2479.66 |
| Tmin (0) °C | Vmin (207)V | F _L | 2401.56 |
| | | F _H | 2479.62 |

| | |
|-------------|--|
| Test Result | F _L : 2401.48MHz F _H : 2479.70 MHz F _H – F _L : 78.22 MHz |
|-------------|--|

Remark:

- F_L Lowest frequency at the appropriate spurious emission level
- F_H Highest frequency at the appropriate spurious emission level

| | | | |
|--------------|---|-----------|-----------|
| Product | Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | | |
| Test Item | Frequency range | | |
| Test Mode | Mode 2: Transmit (Dongle) | | |
| Date of Test | 2007/04/14 | Test Site | No.1 OATS |

| Antenna Gain: -3.67dBi, Duty Cycle: 1 | | | |
|---------------------------------------|-------------|-----------------|---------|
| Test Conditions | | Frequency (MHz) | |
| Tnom (25) °C | Vnom (230)V | F _L | 2401.52 |
| | | F _H | 2479.68 |
| Tmax (35) °C | Vmax (253)V | F _L | 2401.54 |
| | | F _H | 2479.68 |
| Tmax (35) °C | Vmin (207)V | F _L | 2401.66 |
| | | F _H | 2479.68 |
| Tmin (0) °C | Vmax (253)V | F _L | 2401.44 |
| | | F _H | 2479.68 |
| Tmin (0) °C | Vmin (207)V | F _L | 2401.54 |
| | | F _H | 2479.66 |

| | |
|-------------|--|
| Test Result | F _L : 2401.44MHz F _H : 2479.68 MHz F _H - F _L : 78.24 MHz |
|-------------|--|

Remark:

- F_L Lowest frequency at the appropriate spurious emission level
- F_H Highest frequency at the appropriate spurious emission level

5. Transmitter spurious emission

5.1. Test Equipment

The following test equipment are used during the test:


Radiated Emission / Site1

| Instrument | Manufacturer | Type No. | Serial No | Cal. Date |
|-------------------|-----------------|------------|--------------|------------|
| Bilog Antenna | Schaffner Chase | CBL6112B | 2455 | 2006/09/03 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | BBHA9120D312 | 2006/07/29 |
| Pre-Amplifier | HP | 8449B | 3008A01123 | 2006/11/15 |
| Pre-Amplifier | HP | 8447D | 2944A09276 | N/A |
| Spectrum Analyzer | Advantest | R3261C | 81720266 | 2007/03/31 |
| Spectrum Analyzer | R & S | FSP40 | 100005 | 2006/08/25 |
| Test Receiver | R & S | ESCS 30 | 825442/017 | 2007/02/13 |


Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
 2. "N/A" Ca1.Date is used to Pre-test, not final test.

5.2. Test Setup

Under 1GHz Test Setup:

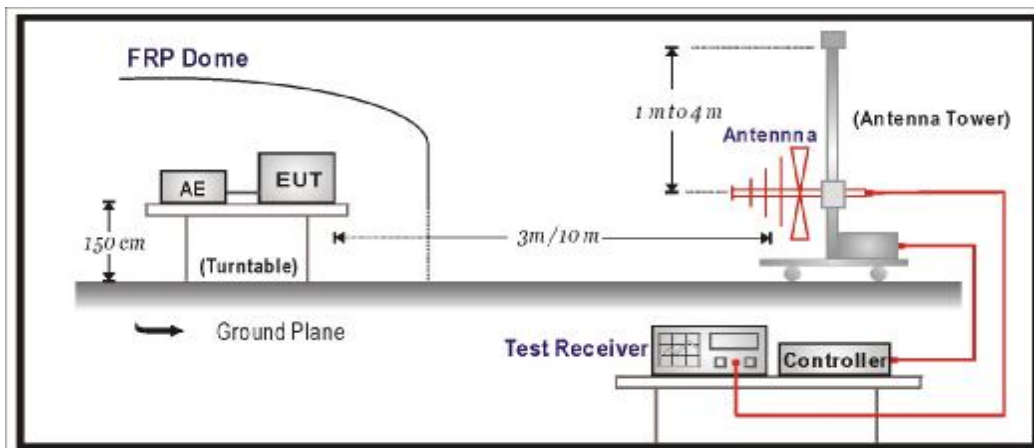

Above 1GHz Test Setup:

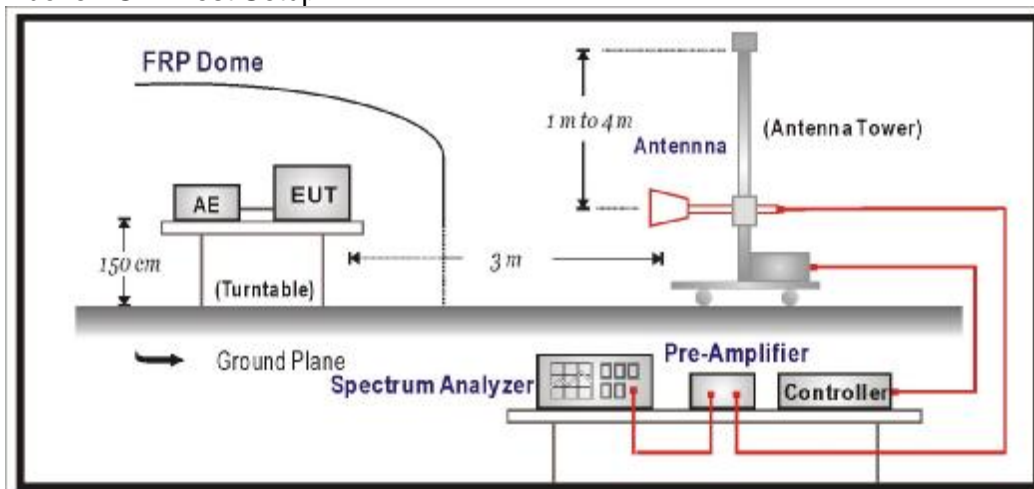

5.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

5.4. Limits

Transmitter limits for narrowband spurious emission

| Frequency Range | Limit when operating | Limit when in standby |
|---|----------------------|-----------------------|
| 30MHzto 1 GHz | -36 dBm | -57 dBm |
| Above 1 GHz to 12.75 GHz | -30 dBm | -47 dBm |
| 1.8 GHz to 1.9 GHz 5.15 GHz to 5.3 GHz | -47 dBm | -47 dBm |

Transmitter limits for wideband spurious emission

| Frequency Range | Limit when operating | Limit when in standby |
|---|----------------------|-----------------------|
| 30MHzto 1 GHz | -86 dBm/Hz | -107 dBm/Hz |
| Above 1 GHz to 12.75 GHz | -80 dBm/Hz | -97 dBm/Hz |
| 1.8 GHz to 1.9 GHz 5.15 GHz to 5.3 GHz | -97 dBm/Hz | -97 dBm/Hz |

5.5. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meters above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Broadband antenna (calibrated bi-log and horn antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement. And a high frequency preamplifier were used increase the sensitivity of the measuring. In order to find the maximum emission, all of the interface cables must be manipulated according to ETSI EN 300 328: V1.6.1 (2004-11) on radiated measurement.

The additional notch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement. The bandwidth setting on the field strength meter (R & S Spectrum Analyzer FSP40)is 100 kHz. The frequency range from 30MHz to 12.75GHz is checked.

5.6. Test Specification

According to ETSI EN 300 328: V1.6.1 (2004-11)


5.7. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB, under 1G is defined as ± 3.8 dB.

5.8. Test Result

30 MHz-1GHz Spurious:

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 10:14 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : TX-39(Mode 1: Transmit (Tablet)) |

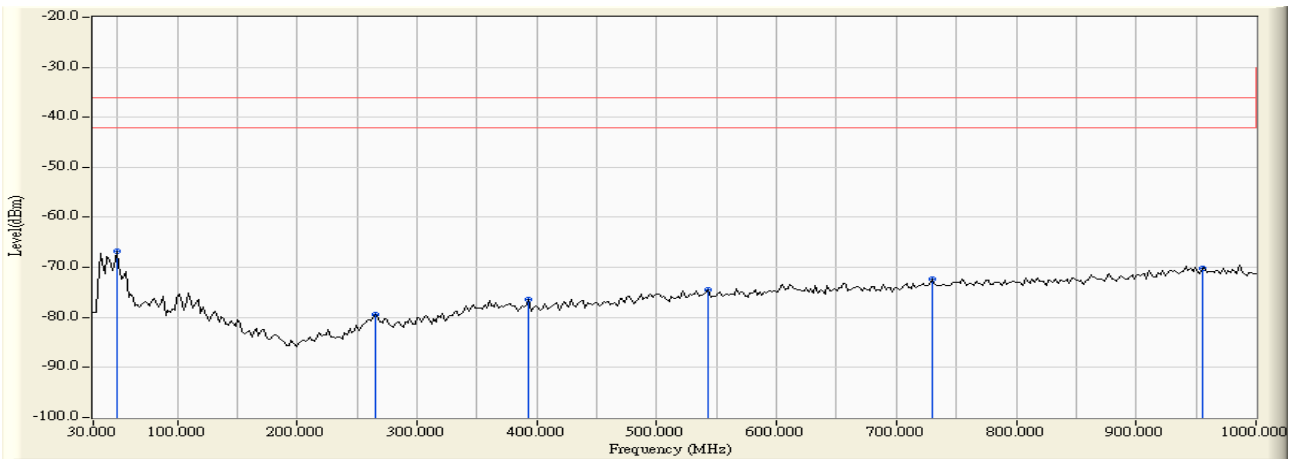


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | * | 49.439 | 12.069 | -78.854 | -66.786 | -30.786 | -36.000 | PEAK |
| 2 | | 265.210 | 0.611 | -80.104 | -79.492 | -43.492 | -36.000 | PEAK |
| 3 | | 393.507 | 3.895 | -80.327 | -76.432 | -40.432 | -36.000 | PEAK |
| 4 | | 543.186 | 6.979 | -81.364 | -74.385 | -38.385 | -36.000 | PEAK |
| 5 | | 729.800 | 8.836 | -81.153 | -72.317 | -36.317 | -36.000 | PEAK |
| 6 | | 955.291 | 11.211 | -81.499 | -70.288 | -34.288 | -36.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 10:19 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : TX-39(Mode 1: Transmit (Tablet)) |

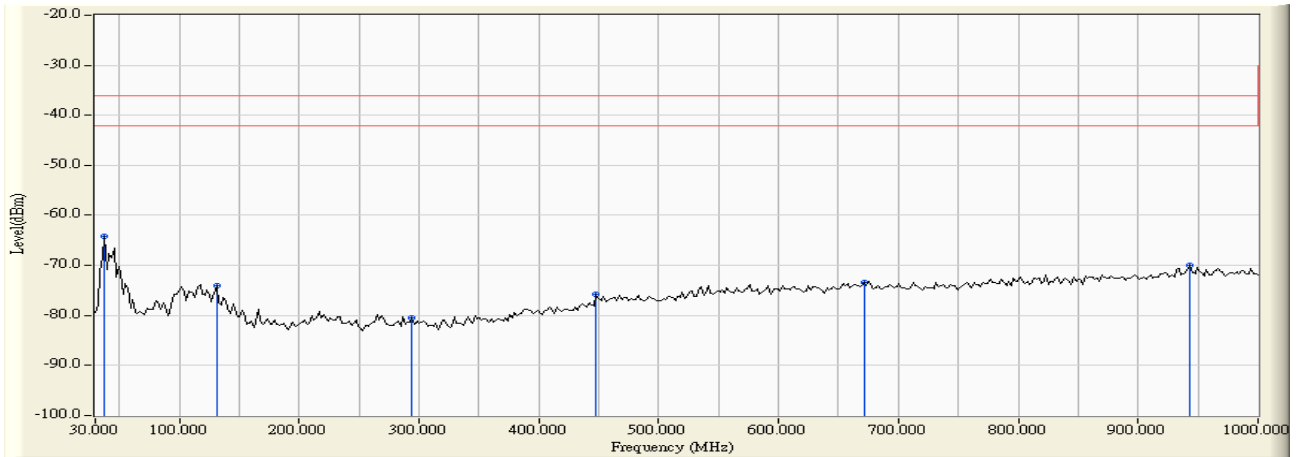


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | * | 37.776 | 11.019 | -75.239 | -64.220 | -28.220 | -36.000 | PEAK |
| 2 | | 131.082 | 5.999 | -80.132 | -74.133 | -38.133 | -36.000 | PEAK |
| 3 | | 294.369 | 1.310 | -81.899 | -80.588 | -44.588 | -36.000 | PEAK |
| 4 | | 447.936 | 5.469 | -81.200 | -75.730 | -39.730 | -36.000 | PEAK |
| 5 | | 671.483 | 8.790 | -82.153 | -73.363 | -37.363 | -36.000 | PEAK |
| 6 | | 943.627 | 10.719 | -80.726 | -70.007 | -34.007 | -36.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 10:29 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : TX-39(Mode 2: Transmit (Dongle)) |

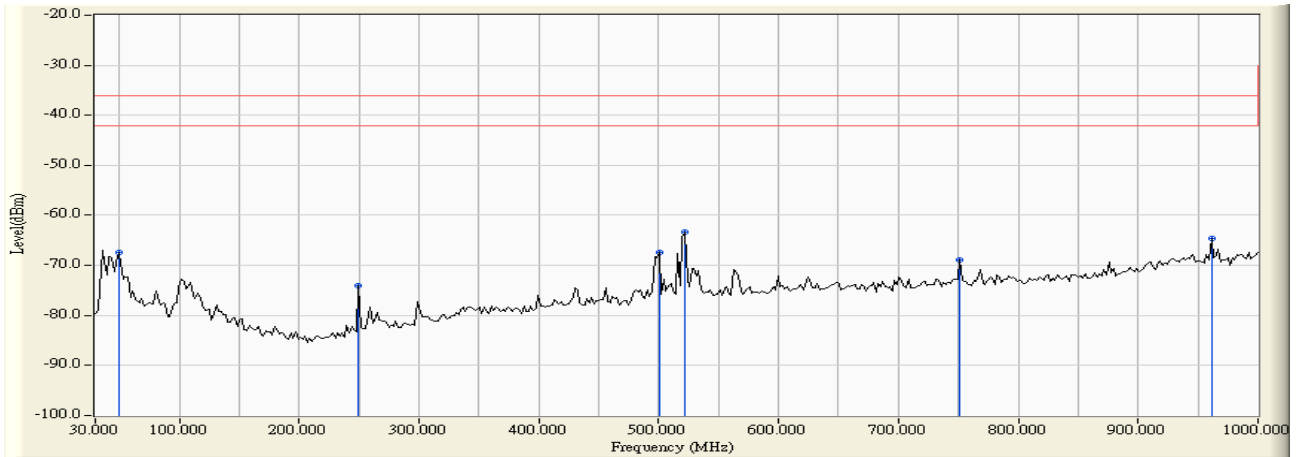


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 49.439 | 12.069 | -79.483 | -67.415 | -31.415 | -36.000 | PEAK |
| 2 | 249.659 | -1.143 | -73.003 | -74.146 | -38.146 | -36.000 | PEAK |
| 3 | 500.421 | 6.099 | -73.422 | -67.323 | -31.323 | -36.000 | PEAK |
| 4 | * 521.804 | 6.460 | -69.681 | -63.220 | -27.220 | -36.000 | PEAK |
| 5 | 751.182 | 8.949 | -77.872 | -68.923 | -32.923 | -36.000 | PEAK |
| 6 | 961.122 | 11.171 | -75.786 | -64.615 | -28.615 | -36.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 10:35 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : TX-39(Mode 2: Transmit (Dongle)) |

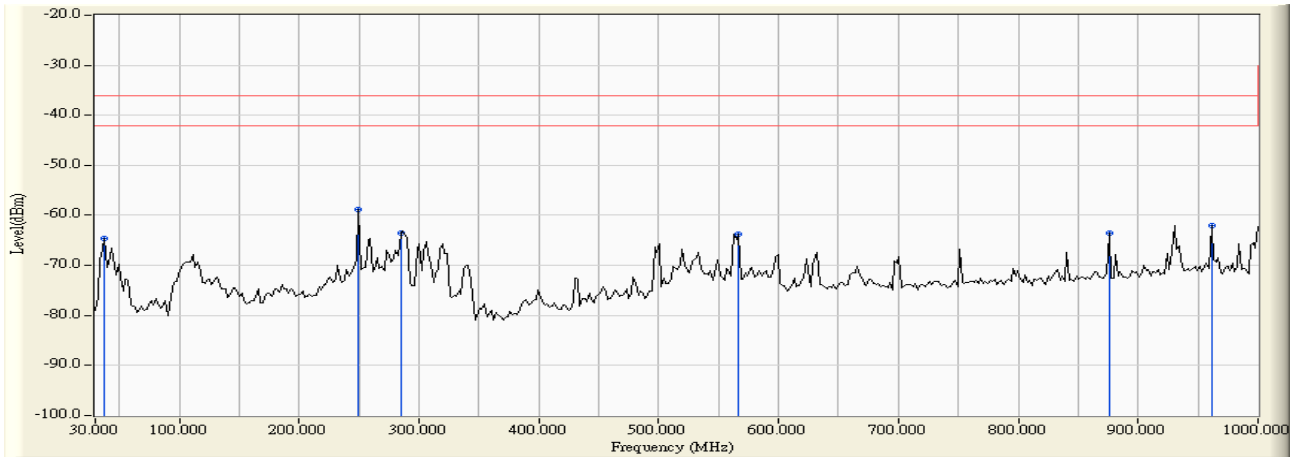


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 37.776 | 11.019 | -75.660 | -64.641 | -28.641 | -36.000 | PEAK |
| 2 | * 249.659 | 0.612 | -59.406 | -58.793 | -22.793 | -36.000 | PEAK |
| 3 | 284.649 | 1.050 | -64.525 | -63.475 | -27.475 | -36.000 | PEAK |
| 4 | 566.513 | 7.728 | -71.474 | -63.746 | -27.746 | -36.000 | PEAK |
| 5 | 875.591 | 9.874 | -73.394 | -63.519 | -27.519 | -36.000 | PEAK |
| 6 | 961.122 | 10.829 | -72.902 | -62.073 | -26.073 | -36.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Harmonic & Spurious:

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:28 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : TX-2402(Mode 1: Transmit (Tablet)) |

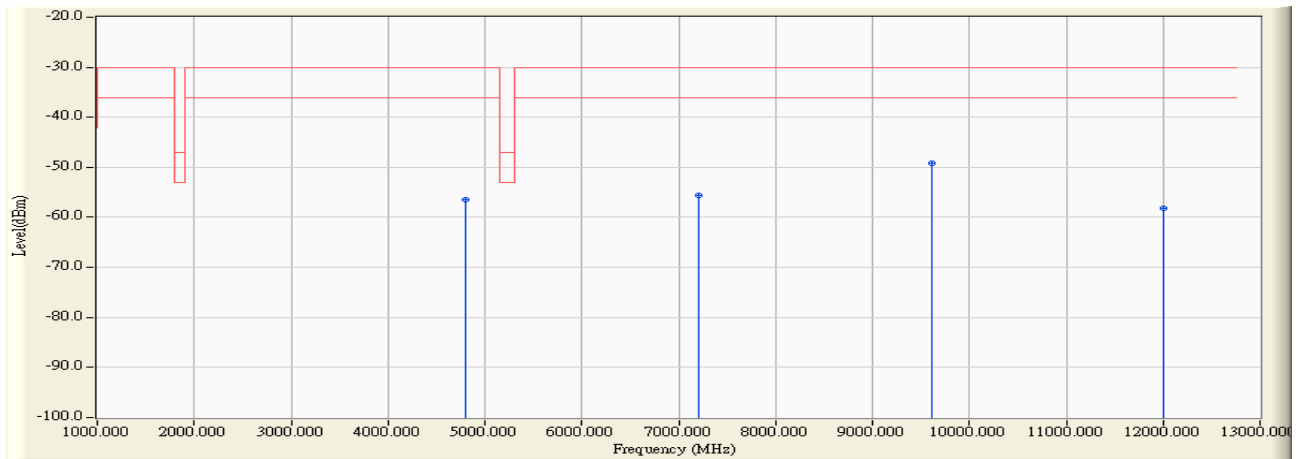


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 4804.180 | 18.412 | -74.850 | -56.439 | -26.439 | -30.000 | PEAK |
| 2 | 7206.770 | 20.451 | -76.030 | -55.579 | -25.579 | -30.000 | PEAK |
| 3 | * 9608.370 | 25.345 | -74.610 | -49.265 | -19.265 | -30.000 | PEAK |
| 4 | 12010.390 | 27.270 | -85.350 | -58.080 | -28.080 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:30 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : TX-2402(Mode 1: Transmit (Tablet)) |

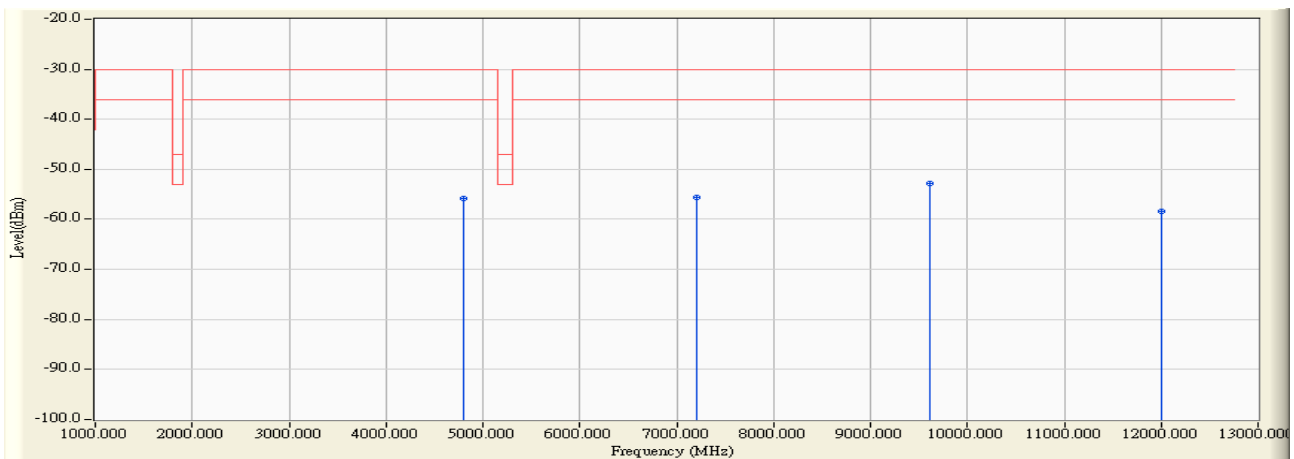


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 4804.180 | 18.667 | -74.570 | -55.903 | -25.903 | -30.000 | PEAK |
| 2 | 7206.320 | 21.262 | -76.790 | -55.528 | -25.528 | -30.000 | PEAK |
| 3 | * 9608.370 | 24.695 | -77.530 | -52.835 | -22.835 | -30.000 | PEAK |
| 4 | 12010.410 | 28.410 | -86.820 | -58.410 | -28.410 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:31 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : TX-2479(Mode 1: Transmit (Tablet)) |

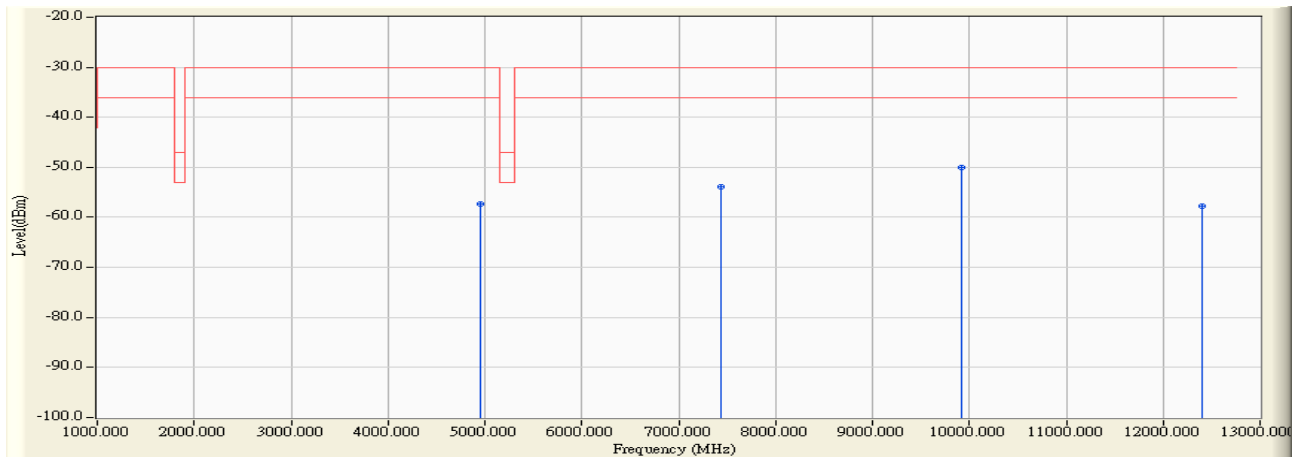


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 4958.190 | 19.578 | -76.850 | -57.271 | -27.271 | -30.000 | PEAK |
| 2 | 7437.280 | 20.587 | -74.450 | -53.863 | -23.863 | -30.000 | PEAK |
| 3 | * 9916.380 | 26.100 | -76.040 | -49.940 | -19.940 | -30.000 | PEAK |
| 4 | 12395.420 | 28.723 | -86.510 | -57.788 | -27.788 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:32 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : TX-2479(Mode 1: Transmit (Tablet)) |

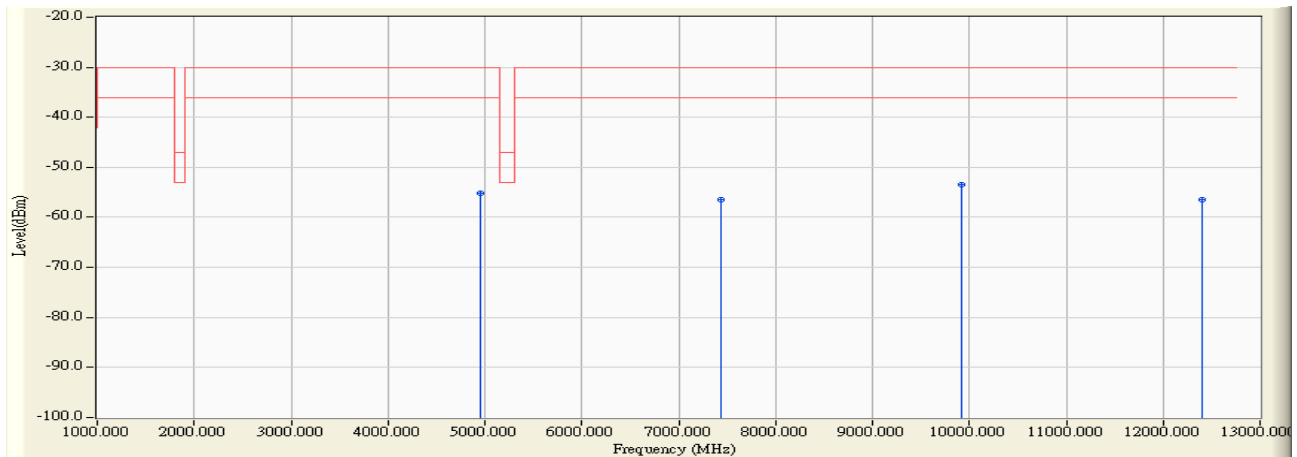


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 4958.190 | 19.160 | -74.390 | -55.230 | -25.230 | -30.000 | PEAK |
| 2 | 7437.790 | 21.534 | -77.960 | -56.426 | -26.426 | -30.000 | PEAK |
| 3 | * 9916.380 | 25.380 | -78.790 | -53.410 | -23.410 | -30.000 | PEAK |
| 4 | 12395.500 | 29.163 | -85.720 | -56.557 | -26.557 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:12 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : TX-2402(Mode 2: Transmit (Dongle)) |

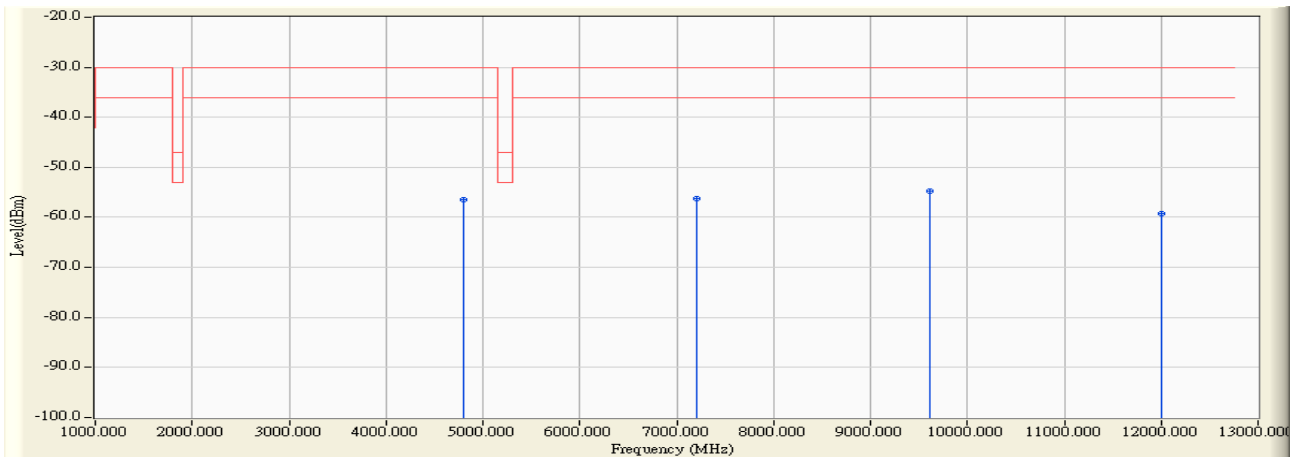


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 4804.210 | 18.412 | -74.840 | -56.429 | -26.429 | -30.000 | PEAK |
| 2 | 7205.410 | 20.449 | -76.780 | -56.330 | -26.330 | -30.000 | PEAK |
| 3 | * 9608.440 | 25.345 | -80.040 | -54.695 | -24.695 | -30.000 | PEAK |
| 4 | 12010.440 | 27.270 | -86.430 | -59.160 | -29.160 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:13 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : TX-2402(Mode 2: Transmit (Dongle)) |

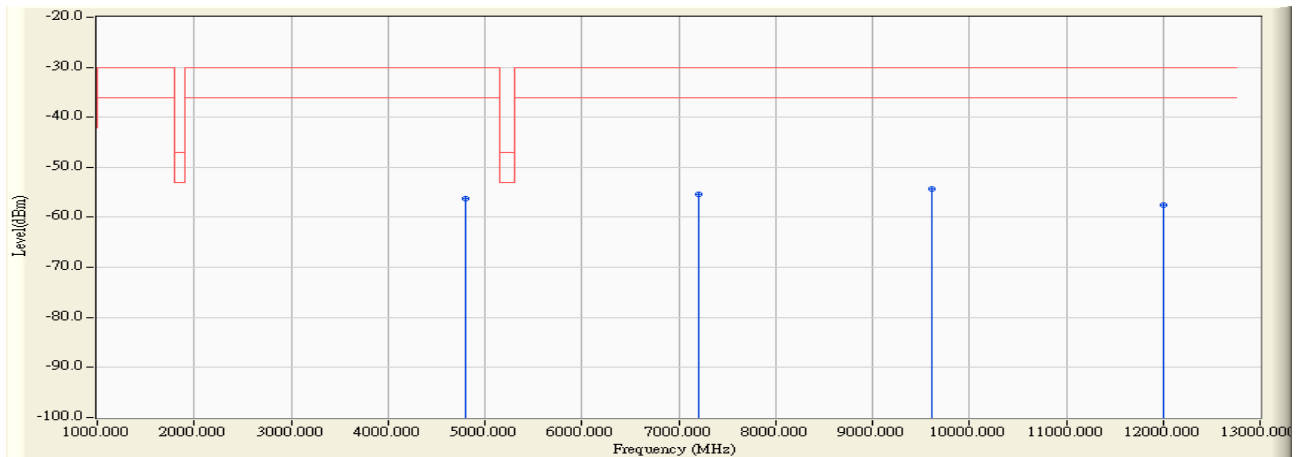


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 4804.230 | 18.667 | -74.930 | -56.263 | -26.263 | -30.000 | PEAK |
| 2 | 7207.310 | 21.263 | -76.690 | -55.427 | -25.427 | -30.000 | PEAK |
| 3 | * 9608.430 | 24.695 | -79.050 | -54.355 | -24.355 | -30.000 | PEAK |
| 4 | 12010.460 | 28.410 | -85.980 | -57.570 | -27.570 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:16 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : TX-2479(Mode 2: Transmit (Dongle)) |

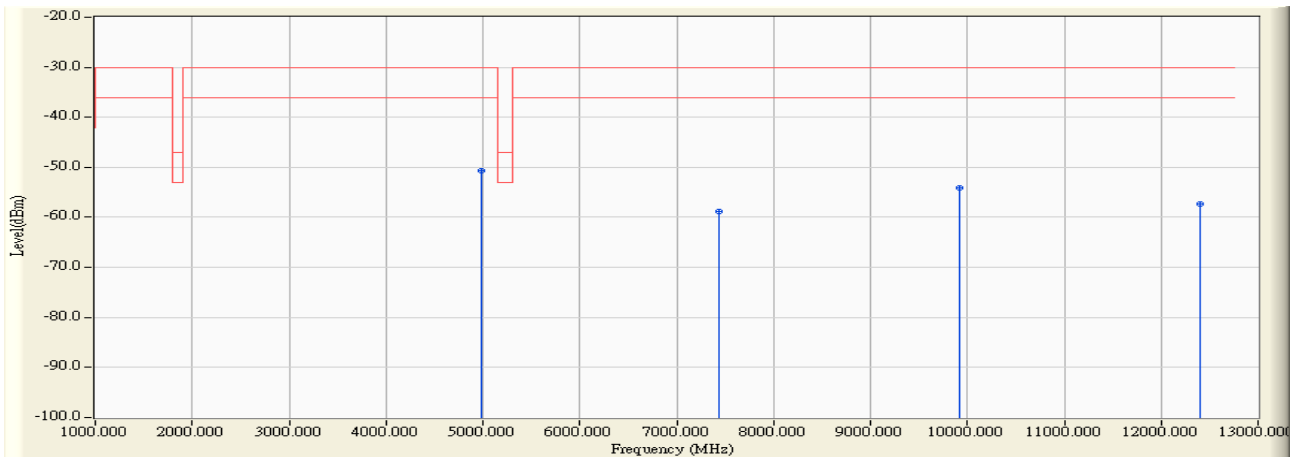


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | * | 4985.210 | 19.776 | -70.460 | -50.685 | -20.685 | -30.000 | PEAK |
| 2 | | 7436.380 | 20.586 | -79.440 | -58.854 | -28.854 | -30.000 | PEAK |
| 3 | | 9916.440 | 26.100 | -80.280 | -54.180 | -24.180 | -30.000 | PEAK |
| 4 | | 12395.240 | 28.722 | -86.070 | -57.348 | -27.348 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:17 |
| Limit : ETSI_300328_TX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : TX-2479(Mode 2: Transmit (Dongle)) |

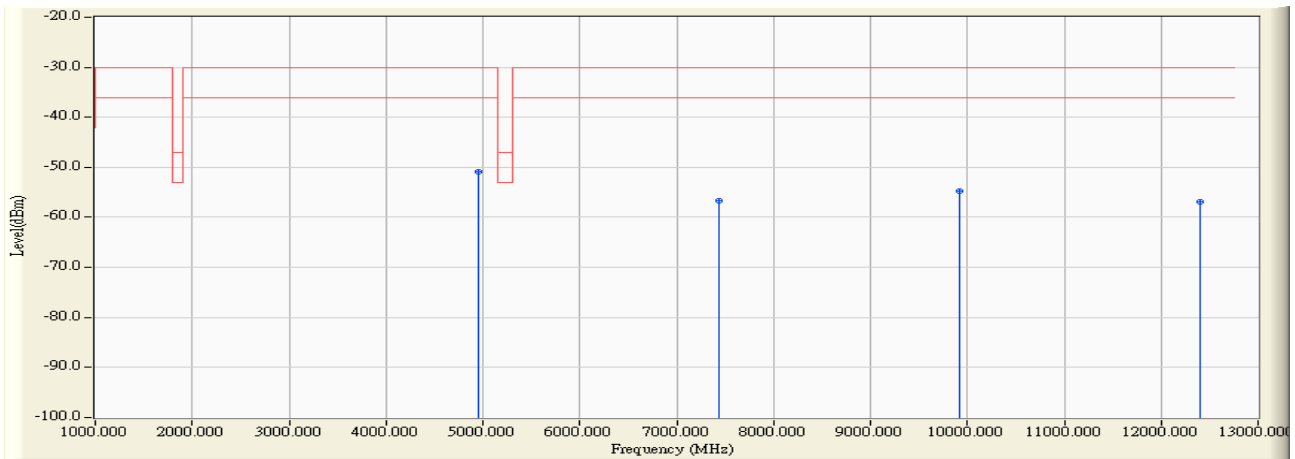

| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | * | 4958.230 | 19.160 | -69.980 | -50.820 | -20.820 | -30.000 | PEAK |
| 2 | | 7436.340 | 21.531 | -78.300 | -56.768 | -26.768 | -30.000 | PEAK |
| 3 | | 9916.460 | 25.380 | -80.110 | -54.730 | -24.730 | -30.000 | PEAK |
| 4 | | 12395.260 | 29.162 | -86.110 | -56.948 | -26.948 | -30.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

5.9. Test Photo

Test Mode : Mode 1: Transmit (Tablet)

Description : Front View of Transmitter spurious emission Test Setup



Test Mode : Mode 1: Transmit (Tablet)

Description : Back View of Transmitter spurious emission Test Setup



Test Mode : Mode 1: Transmit (Tablet)

Description : Front View of Transmitter spurious emission Test Setup (Horn)



Test Mode : Mode 2: Transmit (Dongle)

Description : Front View of Transmitter spurious emission Test Setup



Test Mode : Mode 2: Transmit (Dongle)

Description : Back View of Transmitter spurious emission Test Setup



Test Mode : Mode 2: Transmit (Dongle)

Description : Front View of Transmitter spurious emission Test Setup (Horn)



6. Receiver spurious emission

6.1. Test Equipment

The following test equipment are used during the test:


Radiated Emission / Site1

| Instrument | Manufacturer | Type No. | Serial No | Cal. Date |
|-------------------|-----------------|------------|--------------|------------|
| Bilog Antenna | Schaffner Chase | CBL6112B | 2455 | 2006/09/03 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | BBHA9120D312 | 2006/07/29 |
| Pre-Amplifier | HP | 8449B | 3008A01123 | 2006/11/15 |
| Pre-Amplifier | HP | 8447D | 2944A09276 | N/A |
| Spectrum Analyzer | Advantest | R3261C | 81720266 | 2007/03/31 |
| Spectrum Analyzer | R & S | FSP40 | 100005 | 2006/08/25 |
| Test Receiver | R & S | ESCS 30 | 825442/017 | 2007/02/13 |


- Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
 2. "N/A" Ca1.Date is used to Pre-test, not final test.

6.2. Test Setup

Under 1GHz Test Setup:

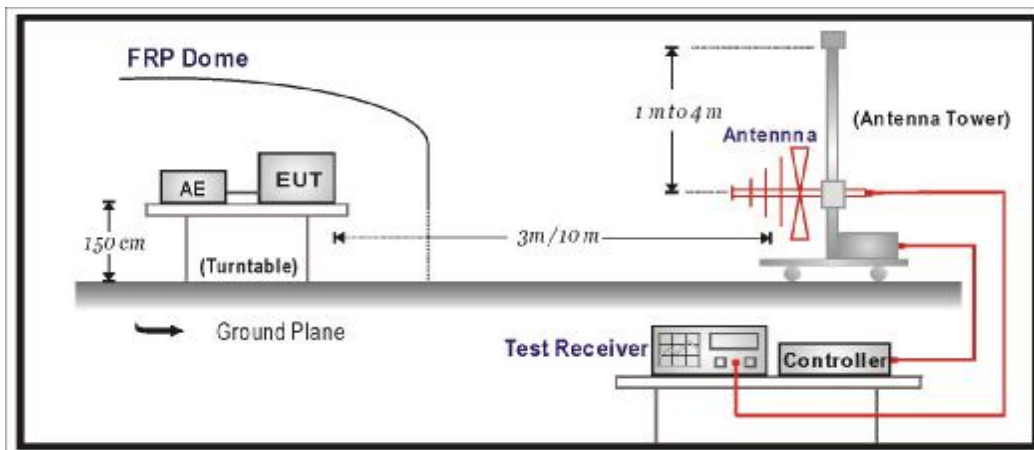

Above 1GHz Test Setup:

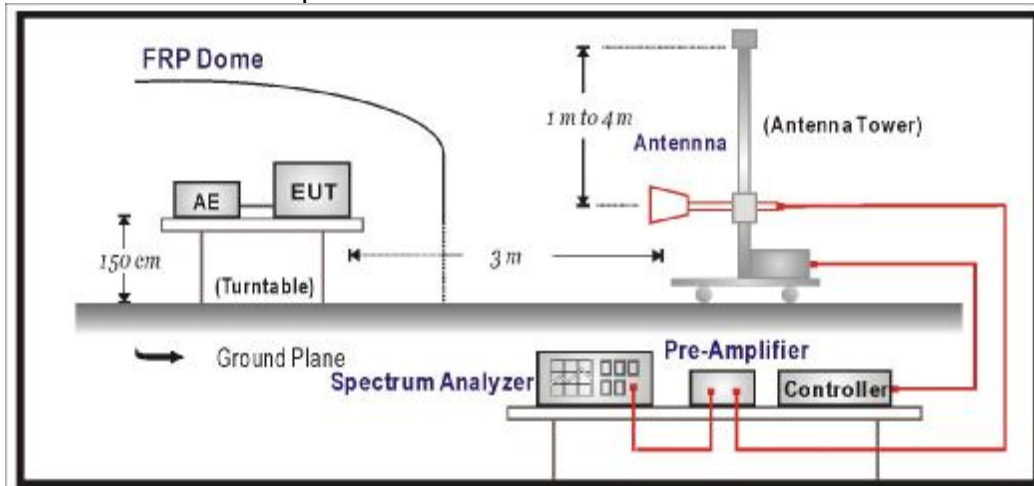

6.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

6.4. Limits

Narrowband spurious emission limit for receivers

| Frequency Range | Limit |
|--------------------------|---------|
| 30MHzto 1 GHz | -57 dBm |
| Above 1 GHz to 12.75 GHz | -47 dBm |

Wideband spurious emission limit for receivers

| Frequency Range | Limit |
|--------------------------|-------------|
| 30MHzto 1 GHz | -107 dBm/Hz |
| Above 1 GHz to 12.75 GHz | -97 dBm/Hz |

6.5. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meters above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Broadband antenna (calibrated bi-log and horn antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement. And a high frequency preamplifier were used increase the sensitivity of the measuring. In order to find the maximum emission, all of the interface cables must be manipulated according to ETSI EN 300 328: V1.6.1 (2004-11) on radiated measurement.

The additional notch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement. The bandwidth setting on the field strength meter (R & S Spectrum Analyzer FSP40)is 100 kHz. The frequency range from 30MHz to 12.75GHz is checked.

6.6. Test Specification

According to ETSI EN 300 328: V1.6.1 (2004-11)


6.7. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB, under 1G is defined as ± 3.8 dB.

6.8. Test Result

30 MHz-1GHz Spurious:

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 10:03 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : RX-39(Mode 3: Receive (Tablet)) |

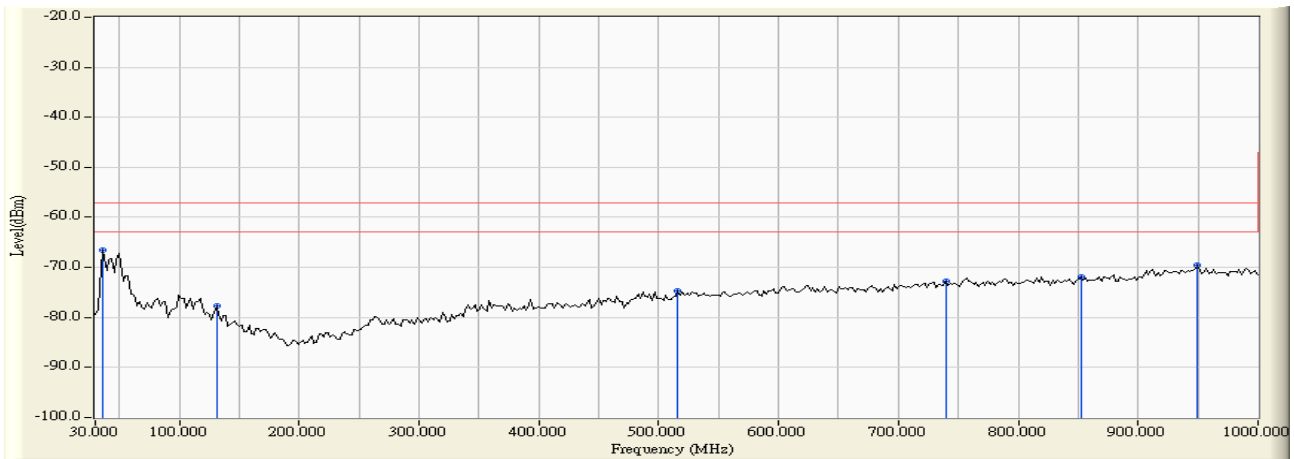


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | * | 35.832 | 12.151 | -78.639 | -66.489 | -9.489 | -57.000 | PEAK |
| 2 | | 131.082 | 2.803 | -80.547 | -77.744 | -20.744 | -57.000 | PEAK |
| 3 | | 515.972 | 6.290 | -80.943 | -74.653 | -17.653 | -57.000 | PEAK |
| 4 | | 739.519 | 8.735 | -81.498 | -72.763 | -15.763 | -57.000 | PEAK |
| 5 | | 852.265 | 9.596 | -81.419 | -71.823 | -14.823 | -57.000 | PEAK |
| 6 | | 949.459 | 11.241 | -80.689 | -69.448 | -12.448 | -57.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 10:06 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : RX-39(Mode 3: Receive (Tablet)) |

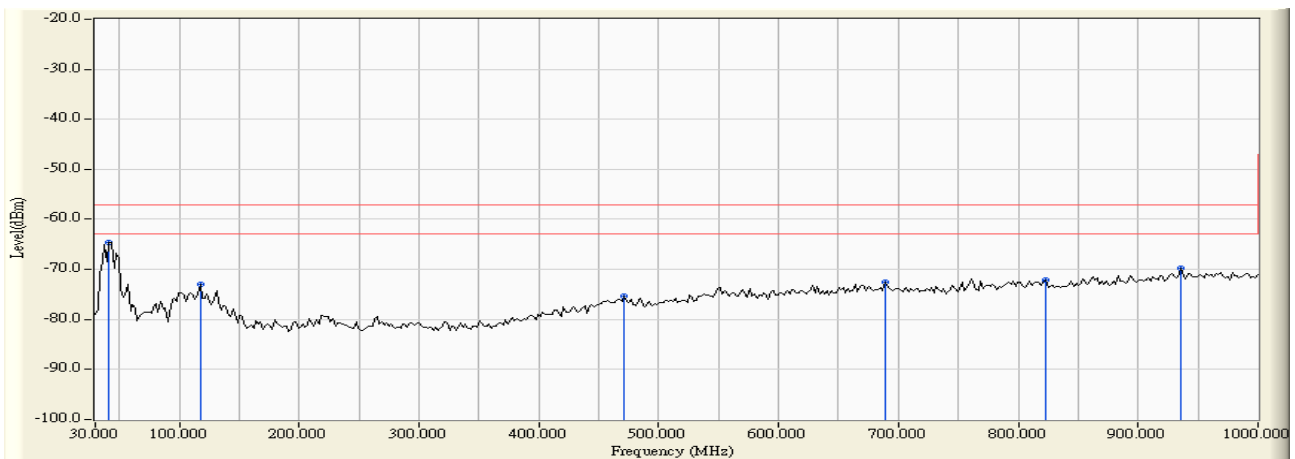


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | * | 41.663 | 10.799 | -75.334 | -64.535 | -7.535 | -57.000 | PEAK |
| 2 | | 117.475 | 6.919 | -79.926 | -73.007 | -16.007 | -57.000 | PEAK |
| 3 | | 471.263 | 5.991 | -81.291 | -75.300 | -18.300 | -57.000 | PEAK |
| 4 | | 688.978 | 8.326 | -80.786 | -72.460 | -15.460 | -57.000 | PEAK |
| 5 | | 823.106 | 9.242 | -81.387 | -72.145 | -15.145 | -57.000 | PEAK |
| 6 | | 935.852 | 10.794 | -80.563 | -69.769 | -12.769 | -57.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 13:14 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note :RX-39(Mode 4: Receive (Dongle)) |

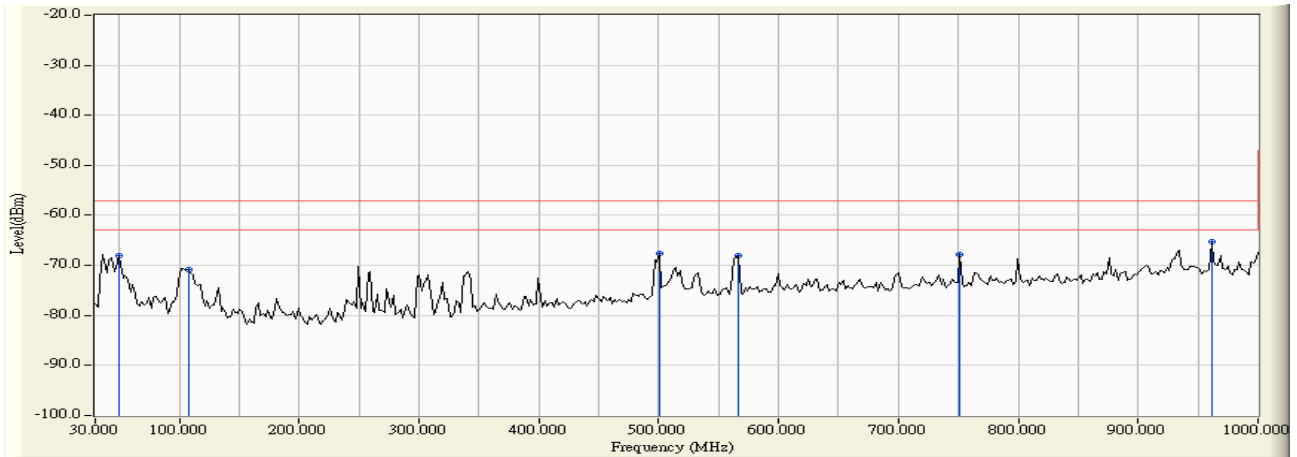


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 49.439 | 12.069 | -80.146 | -68.078 | -11.078 | -57.000 | PEAK |
| 2 | 107.756 | 4.904 | -75.703 | -70.799 | -13.799 | -57.000 | PEAK |
| 3 | 500.421 | 6.099 | -73.693 | -67.594 | -10.594 | -57.000 | PEAK |
| 4 | 566.513 | 7.290 | -75.340 | -68.050 | -11.050 | -57.000 | PEAK |
| 5 | 751.182 | 8.949 | -76.786 | -67.837 | -10.837 | -57.000 | PEAK |
| 6 | * 961.122 | 11.171 | -76.526 | -65.355 | -8.355 | -57.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/19 - 13:20 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_30-1G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note :RX-39(Mode 4: Receive (Dongle)) |

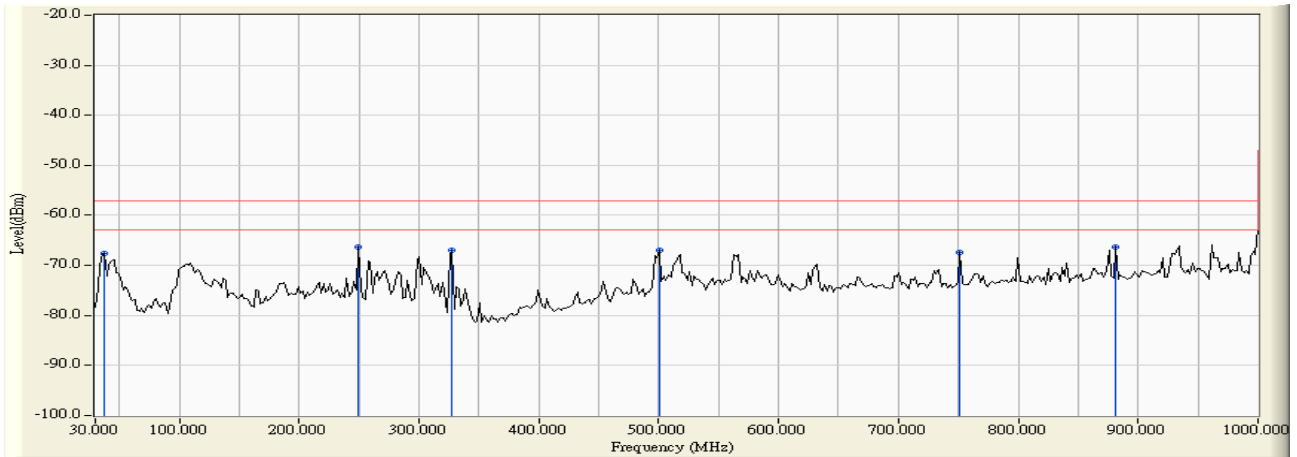


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 37.776 | 11.019 | -78.547 | -67.528 | -10.528 | -57.000 | PEAK |
| 2 | 249.659 | 0.612 | -66.984 | -66.371 | -9.371 | -57.000 | PEAK |
| 3 | 327.415 | 0.781 | -67.816 | -67.035 | -10.035 | -57.000 | PEAK |
| 4 | 500.421 | 5.899 | -72.933 | -67.034 | -10.034 | -57.000 | PEAK |
| 5 | 751.182 | 8.375 | -75.849 | -67.474 | -10.474 | -57.000 | PEAK |
| 6 | * 881.423 | 9.980 | -76.318 | -66.338 | -9.338 | -57.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

1GHz Spurious

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:33 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : RX-01((Mode 3: Receive (Tablet))) |

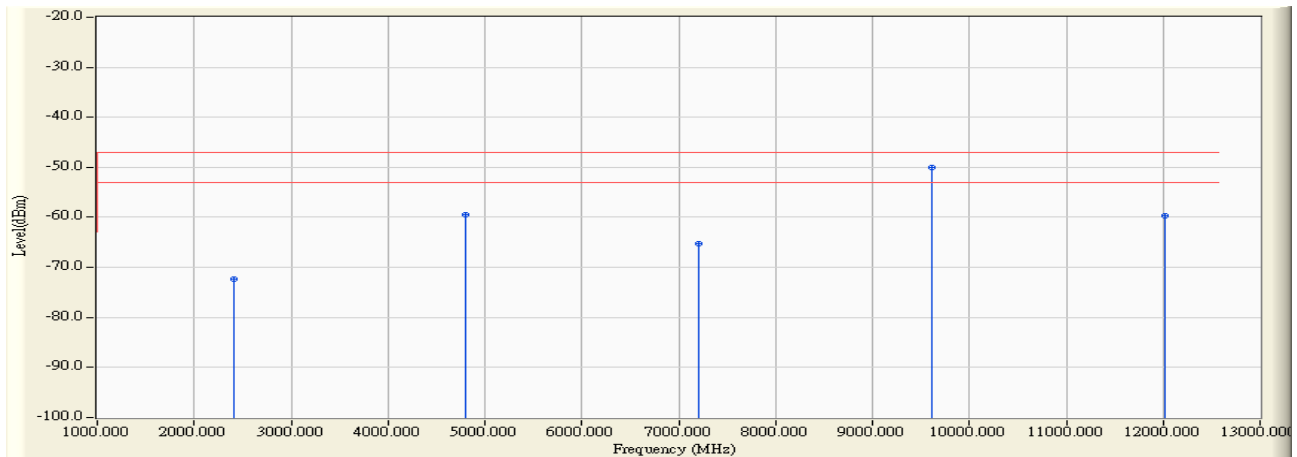


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2404.000 | 8.914 | -81.330 | -72.416 | -25.416 | -47.000 | PEAK |
| 2 | 4804.170 | 18.410 | -77.860 | -59.449 | -12.449 | -47.000 | PEAK |
| 3 | 7212.190 | 20.453 | -85.710 | -65.256 | -18.256 | -47.000 | PEAK |
| 4 | * 9616.360 | 25.364 | -75.380 | -50.016 | -3.016 | -47.000 | PEAK |
| 5 | 12020.370 | 27.305 | -87.050 | -59.745 | -12.745 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:35 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : RX-01((Mode 3: Receive (Tablet))) |

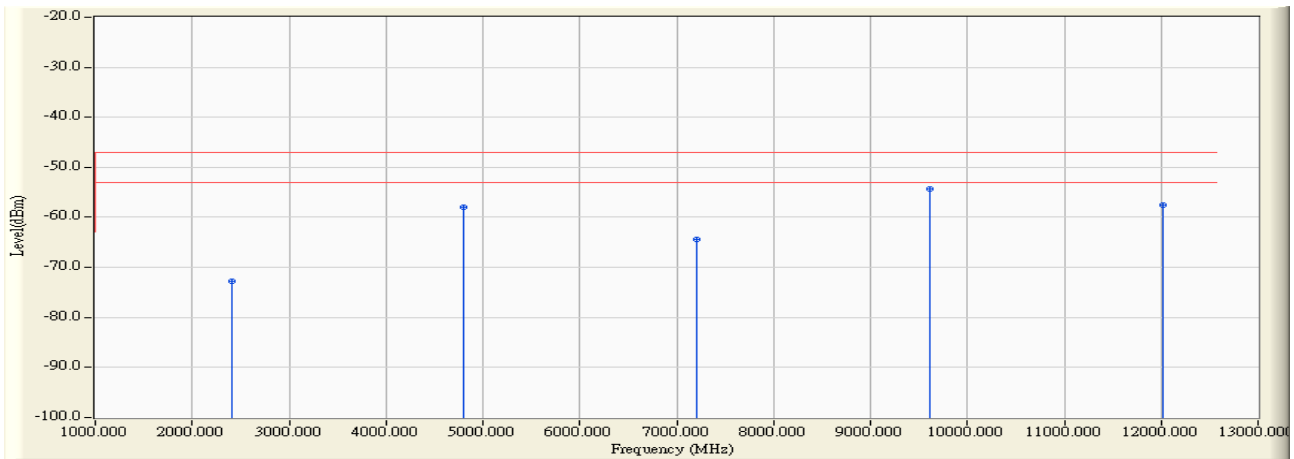


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2404.000 | 9.532 | -82.370 | -72.838 | -25.838 | -47.000 | PEAK |
| 2 | 4808.170 | 18.681 | -76.570 | -57.890 | -10.890 | -47.000 | PEAK |
| 3 | 7212.350 | 21.269 | -85.720 | -64.451 | -17.451 | -47.000 | PEAK |
| 4 | * 9616.370 | 24.714 | -78.990 | -54.276 | -7.276 | -47.000 | PEAK |
| 5 | 12019.990 | 28.426 | -86.000 | -57.573 | -10.573 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:36 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : RX-78((Mode 3: Receive (Tablet))) |

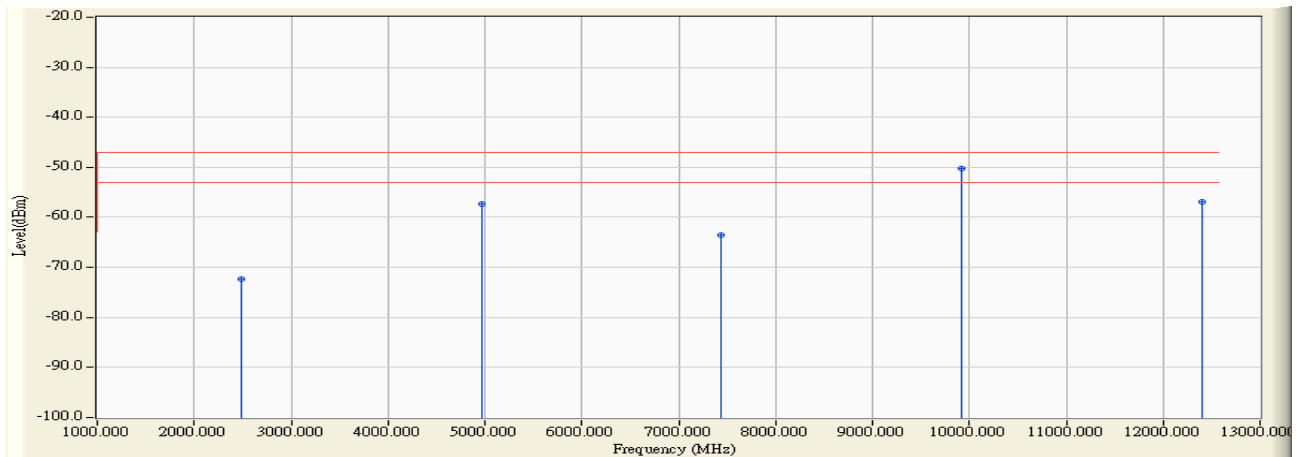


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2481.100 | 9.074 | -81.430 | -72.355 | -25.355 | -47.000 | PEAK |
| 2 | 4962.200 | 19.608 | -76.860 | -57.252 | -10.252 | -47.000 | PEAK |
| 3 | 7442.580 | 20.591 | -84.050 | -63.460 | -16.460 | -47.000 | PEAK |
| 4 | * 9924.410 | 26.118 | -76.360 | -50.241 | -3.241 | -47.000 | PEAK |
| 5 | 12405.380 | 28.763 | -85.620 | -56.857 | -9.857 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:37 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : RX-78((Mode 3: Receive (Tablet))) |

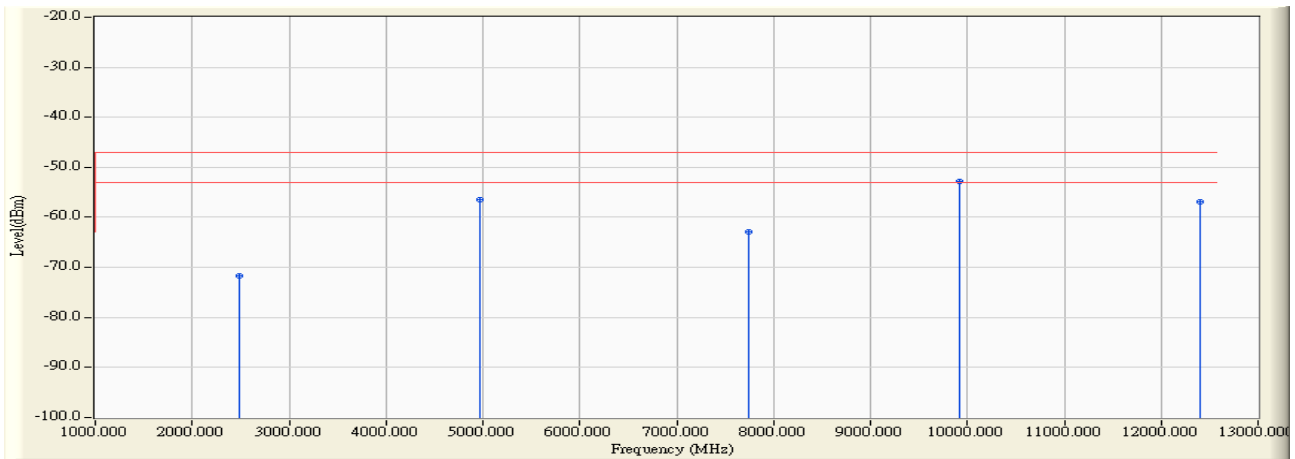


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2481.190 | 9.643 | -81.330 | -71.687 | -24.687 | -47.000 | PEAK |
| 2 | 4962.200 | 19.173 | -75.660 | -56.486 | -9.486 | -47.000 | PEAK |
| 3 | 7743.390 | 21.990 | -84.970 | -62.980 | -15.980 | -47.000 | PEAK |
| 4 | * 9924.380 | 25.398 | -78.160 | -52.761 | -5.761 | -47.000 | PEAK |
| 5 | 12405.380 | 29.186 | -85.970 | -56.784 | -9.784 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:23 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : RX-01((Mode 4: Receive (Dongle)) |

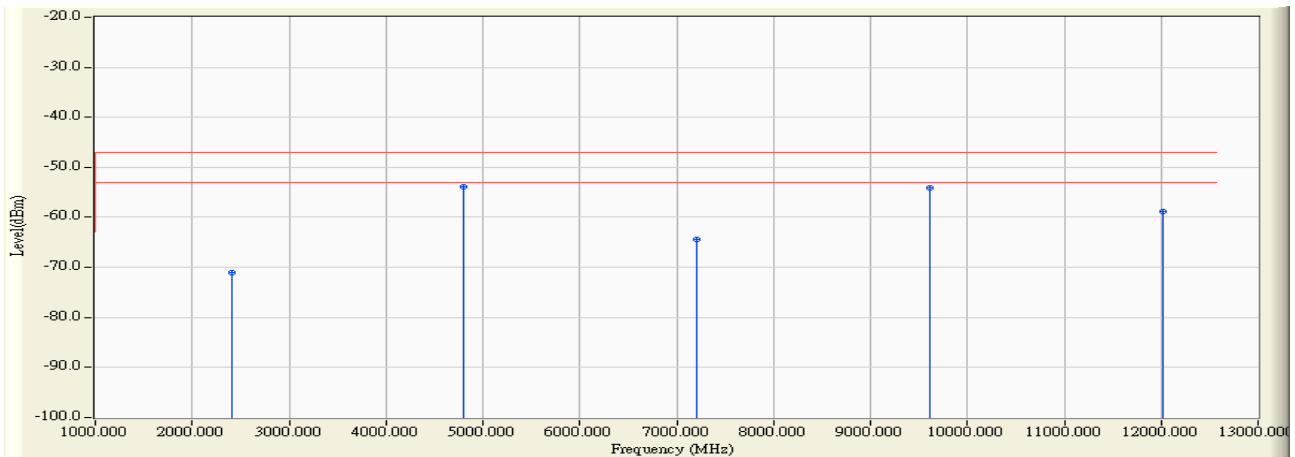


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2404.120 | 8.914 | -80.060 | -71.146 | -24.146 | -47.000 | PEAK |
| 2 | * 4808.230 | 18.442 | -72.370 | -53.928 | -6.928 | -47.000 | PEAK |
| 3 | 7212.120 | 20.453 | -84.780 | -64.326 | -17.326 | -47.000 | PEAK |
| 4 | 9616.460 | 25.364 | -79.570 | -54.206 | -7.206 | -47.000 | PEAK |
| 5 | 12020.460 | 27.306 | -86.020 | -58.714 | -11.714 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:24 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : RX-01((Mode 4: Receive (Dongle)) |

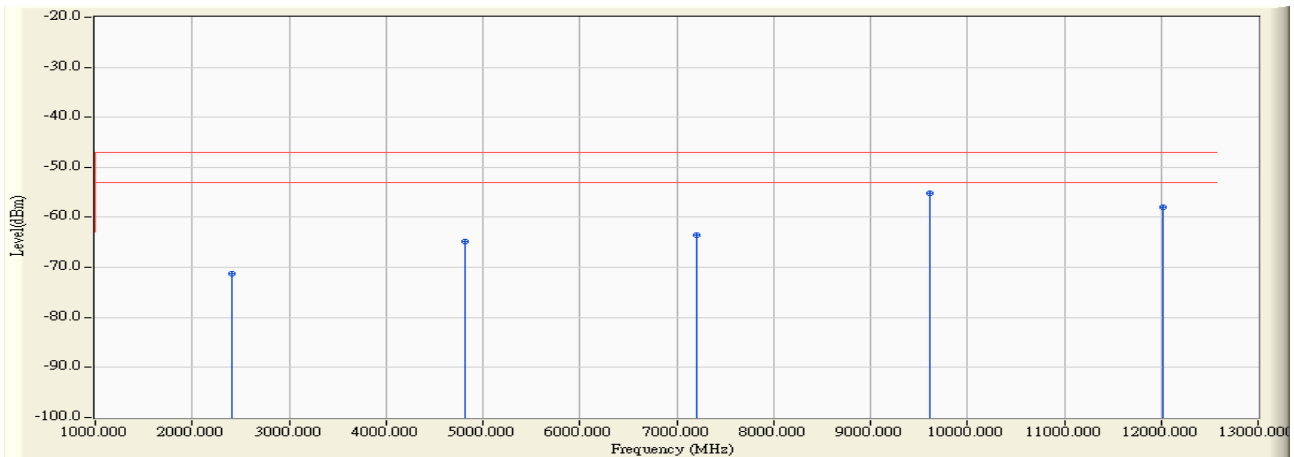


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2404.450 | 9.532 | -80.720 | -71.188 | -24.188 | -47.000 | PEAK |
| 2 | 4808.450 | 18.681 | -83.450 | -64.769 | -17.769 | -47.000 | PEAK |
| 3 | 7212.460 | 21.269 | -84.780 | -63.511 | -16.511 | -47.000 | PEAK |
| 4 | * 9616.450 | 24.715 | -79.840 | -55.126 | -8.126 | -47.000 | PEAK |
| 5 | 12020.460 | 28.428 | -86.470 | -58.042 | -11.042 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:26 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - HORIZONTAL |
| Power : AC 230V/50Hz | Note : RX-78((Mode 4: Receive (Dongle)) |

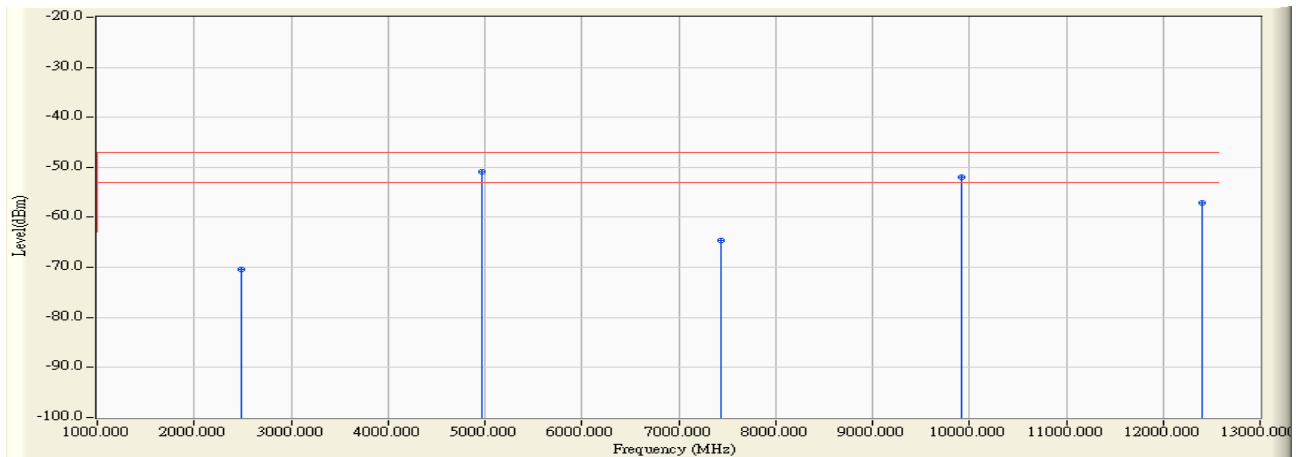


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | | 2481.120 | 9.074 | -79.390 | -70.315 | -23.315 | -47.000 | PEAK |
| 2 | * | 4962.230 | 19.608 | -70.590 | -50.981 | -3.981 | -47.000 | PEAK |
| 3 | | 7443.470 | 20.590 | -85.150 | -64.560 | -17.560 | -47.000 | PEAK |
| 4 | | 9924.470 | 26.119 | -78.180 | -52.061 | -5.061 | -47.000 | PEAK |
| 5 | | 12405.470 | 28.764 | -85.920 | -57.156 | -10.156 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

| | |
|---|---|
| Site : Site 1 | Time : 2007/04/20 - 16:27 |
| Limit : ETSI_300328_RX_00M_PK | Margin : 6 |
| EUT : Tablet: Wireless Tablet X860/X861; Dongle: Wireless Tablet Receiver X860/X861 | Probe : CE_Replace_1-18G(200701) - VERTICAL |
| Power : AC 230V/50Hz | Note : RX-78((Mode 4: Receive (Dongle)) |

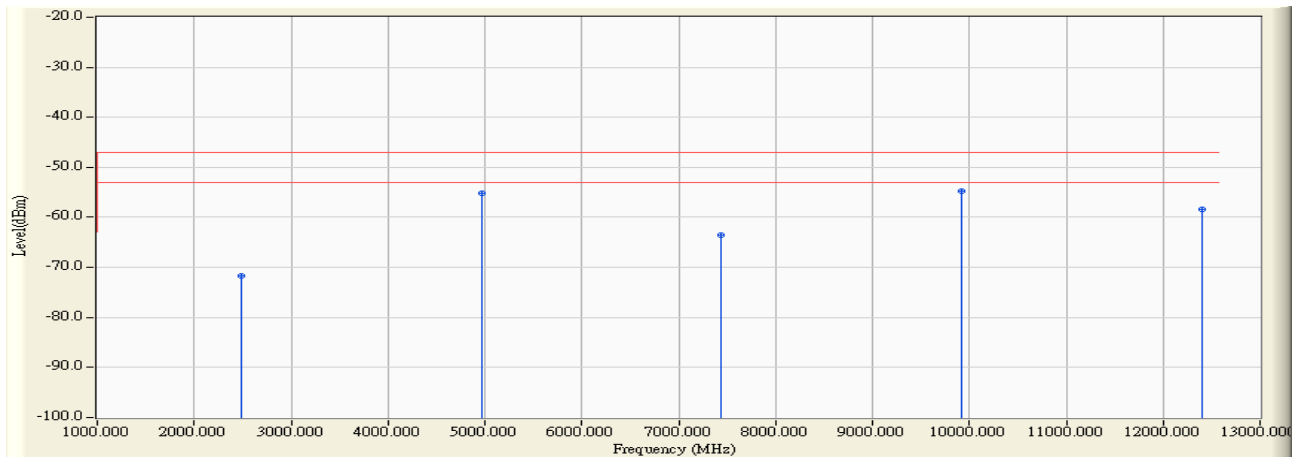

| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBm) | Measure Level (dBm) | Margin (dB) | Limit (dBm) | Detector Type |
|---|-----------------|---------------------|---------------------|---------------------|-------------|-------------|---------------|
| 1 | 2481.130 | 9.643 | -81.230 | -71.587 | -24.587 | -47.000 | PEAK |
| 2 | 4962.220 | 19.173 | -74.250 | -55.076 | -8.076 | -47.000 | PEAK |
| 3 | 7443.230 | 21.540 | -85.120 | -63.580 | -16.580 | -47.000 | PEAK |
| 4 | * 9924.480 | 25.399 | -80.150 | -54.751 | -7.751 | -47.000 | PEAK |
| 5 | 12405.460 | 29.186 | -87.530 | -58.344 | -11.344 | -47.000 | PEAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied

6.9. Test Photo

Test Mode : Mode 3: Receive (Tablet)

Description : Front View of Receiver spurious emission Test Setup



Test Mode : Mode 3: Receive (Tablet)

Description : Back View of Receiver spurious emission Test Setup



Test Mode : Mode 3: Receive (Tablet)

Description : Front View of Receiver spurious emission Test Setup (Horn)



Test Mode : Mode 4: Receive (Dongle)

Description : Front View of Receiver spurious emission Test Setup



Test Mode : Mode 4: Receive (Dongle)

Description : Back View of Receiver spurious emission Test Setup



Test Mode : Mode 4: Receive (Dongle)

Description : Front View of Receiver spurious emission Test Setup (Horn)



Attachement**Ø EUT Photograph**

(1) EUT Photo (Tablet)



(2) EUT Photo



(3) EUT Photo




(4) EUT Photo



(5) EUT Photo



(6) EUT Photo

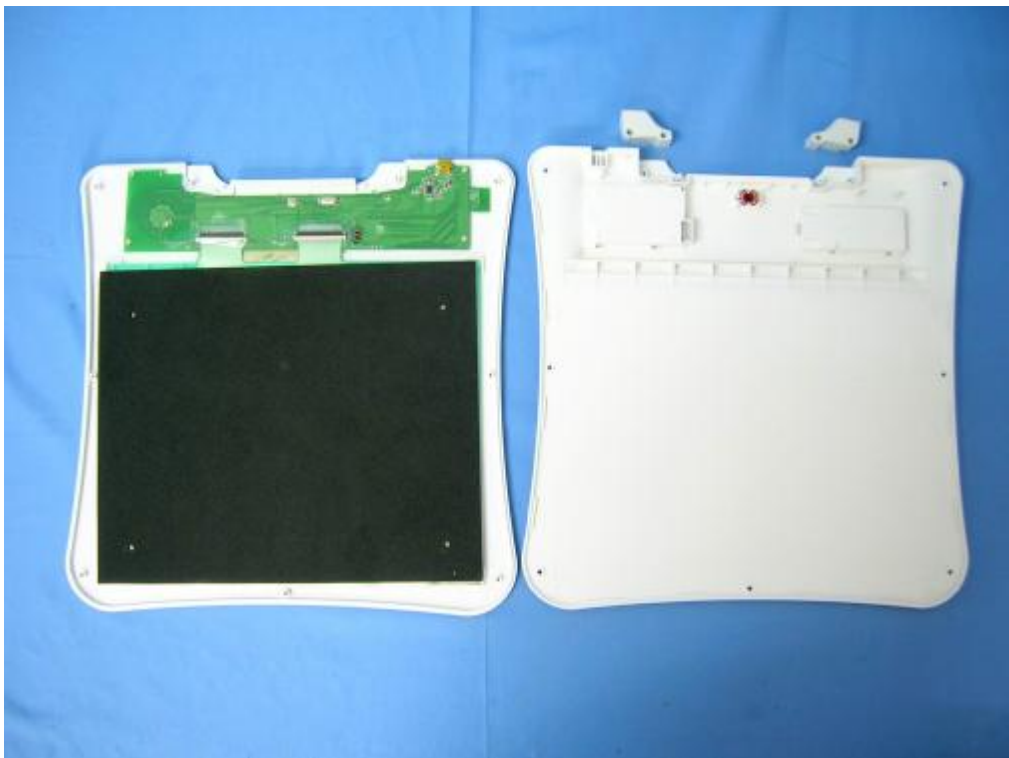


(7) EUT Photo




(8) EUT Photo




(9) EUT Photo

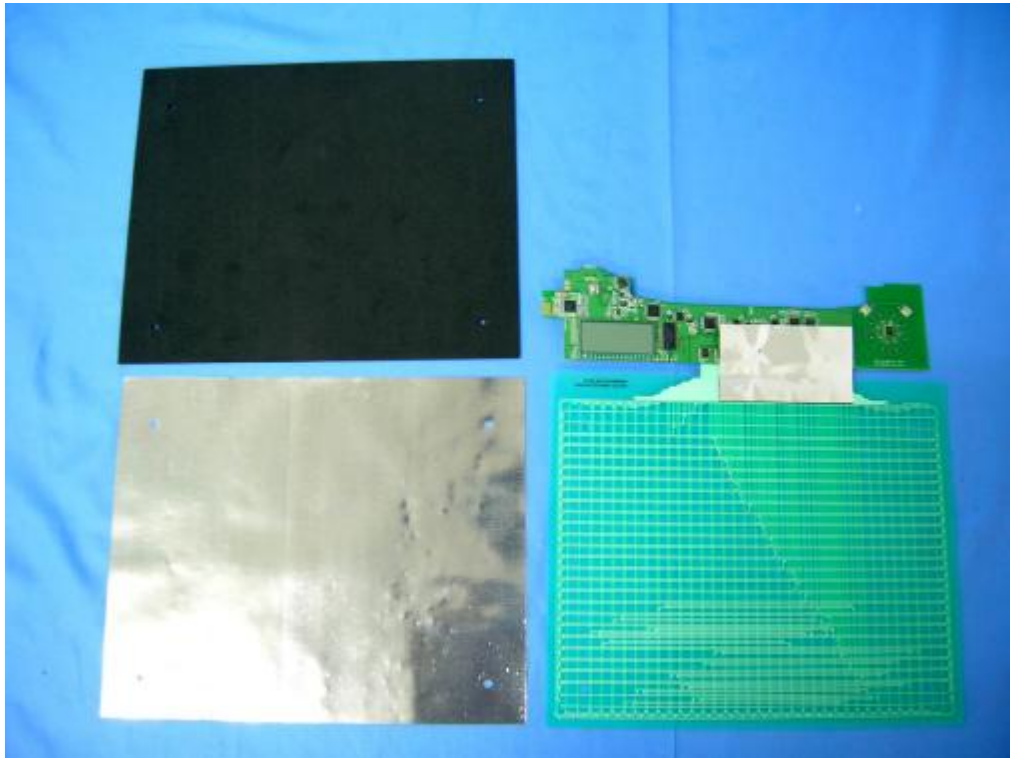


(10) EUT Photo

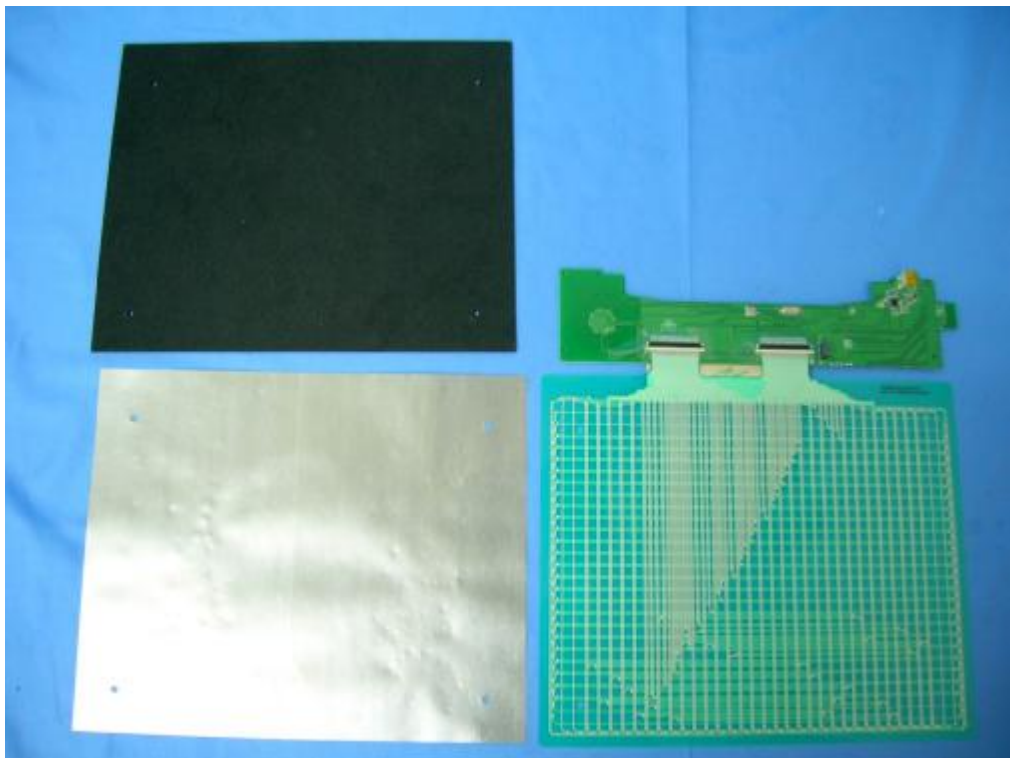


(11) EUT Photo

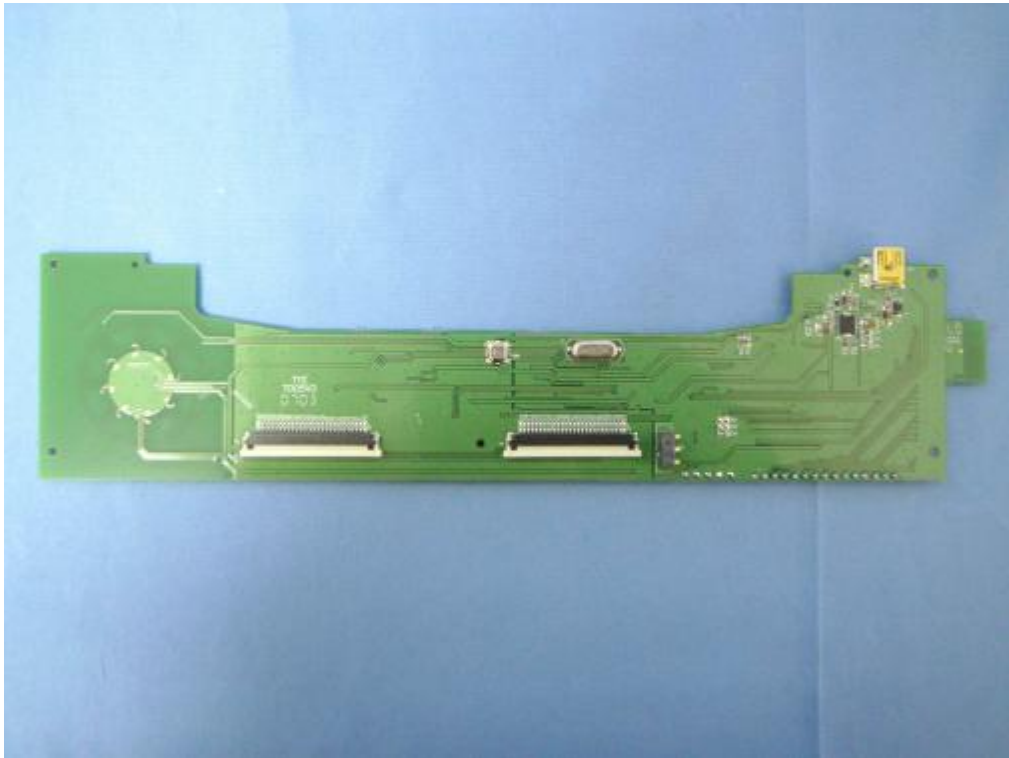


(12) EUT Photo

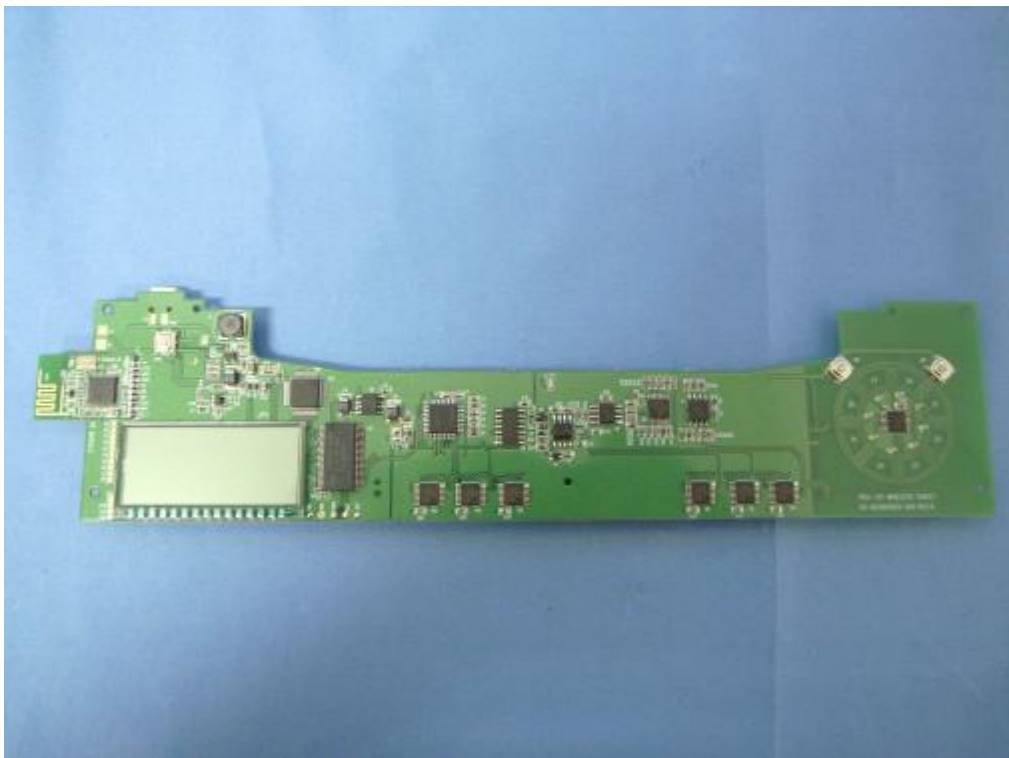

(13) EUT Photo

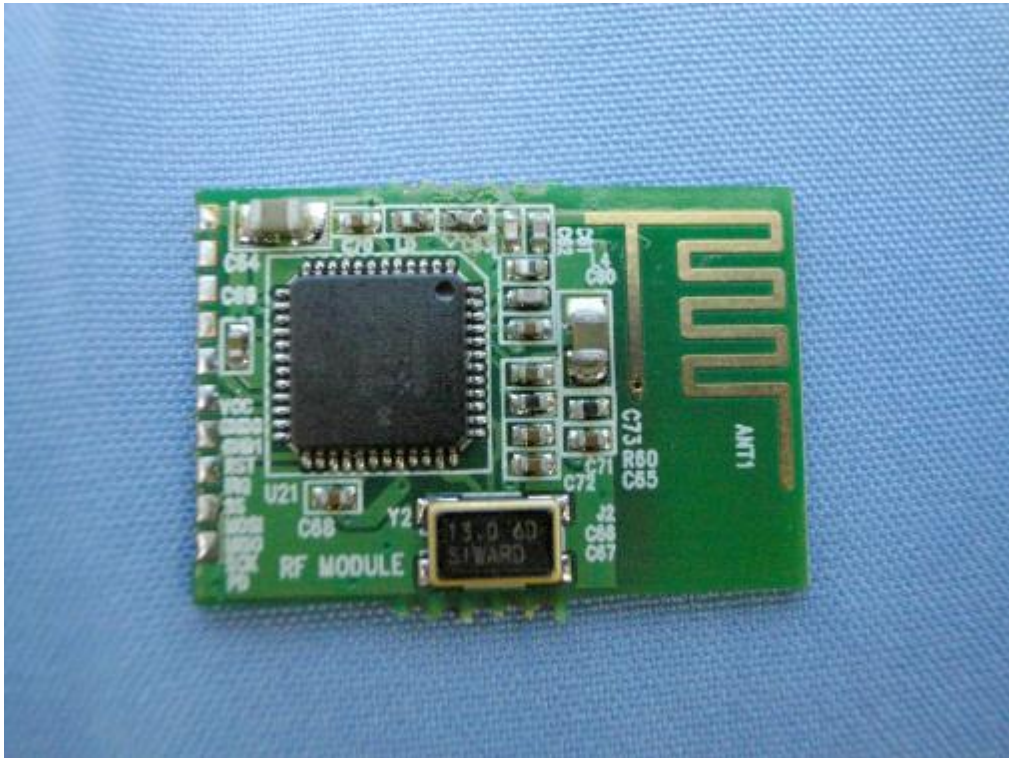

(14) EUT Photo

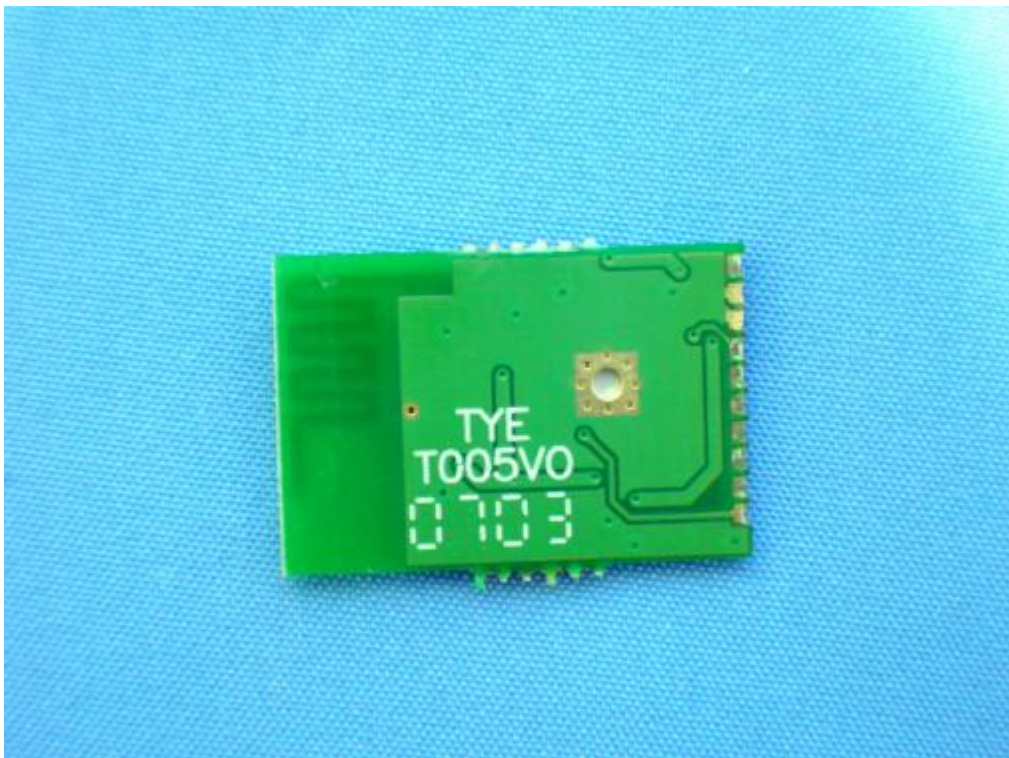

(15) EUT Photo



(16) EUT Photo




(17) EUT Photo (Dongle)




(18) EUT Photo




(19) EUT Photo

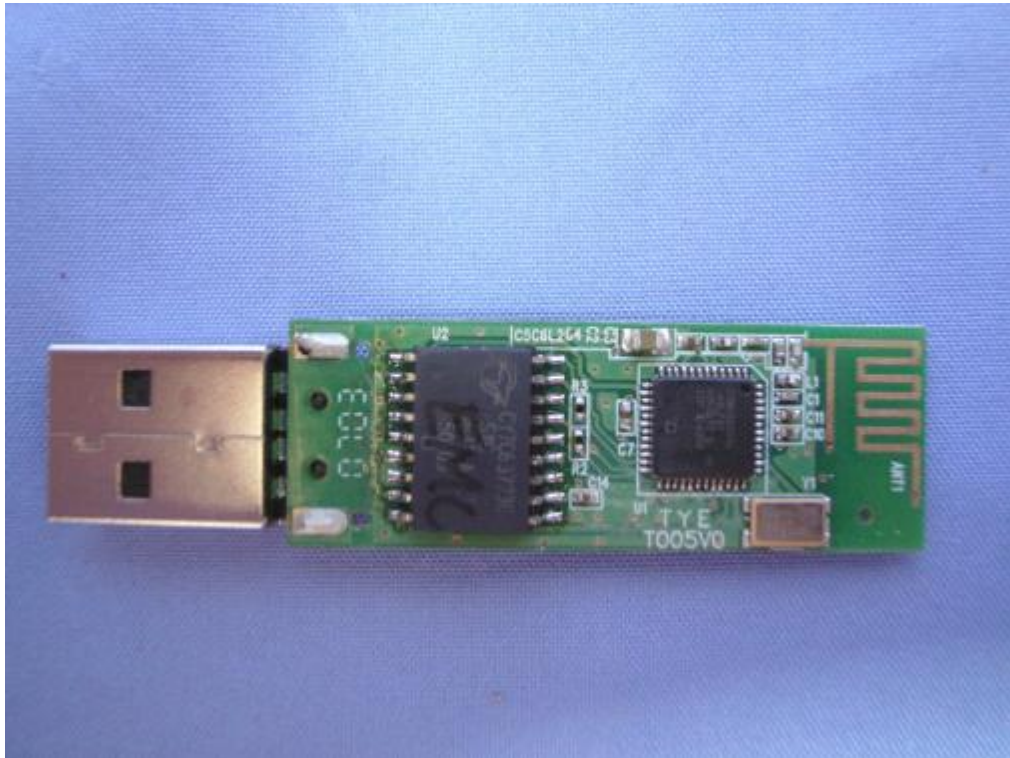

(20) EUT Photo

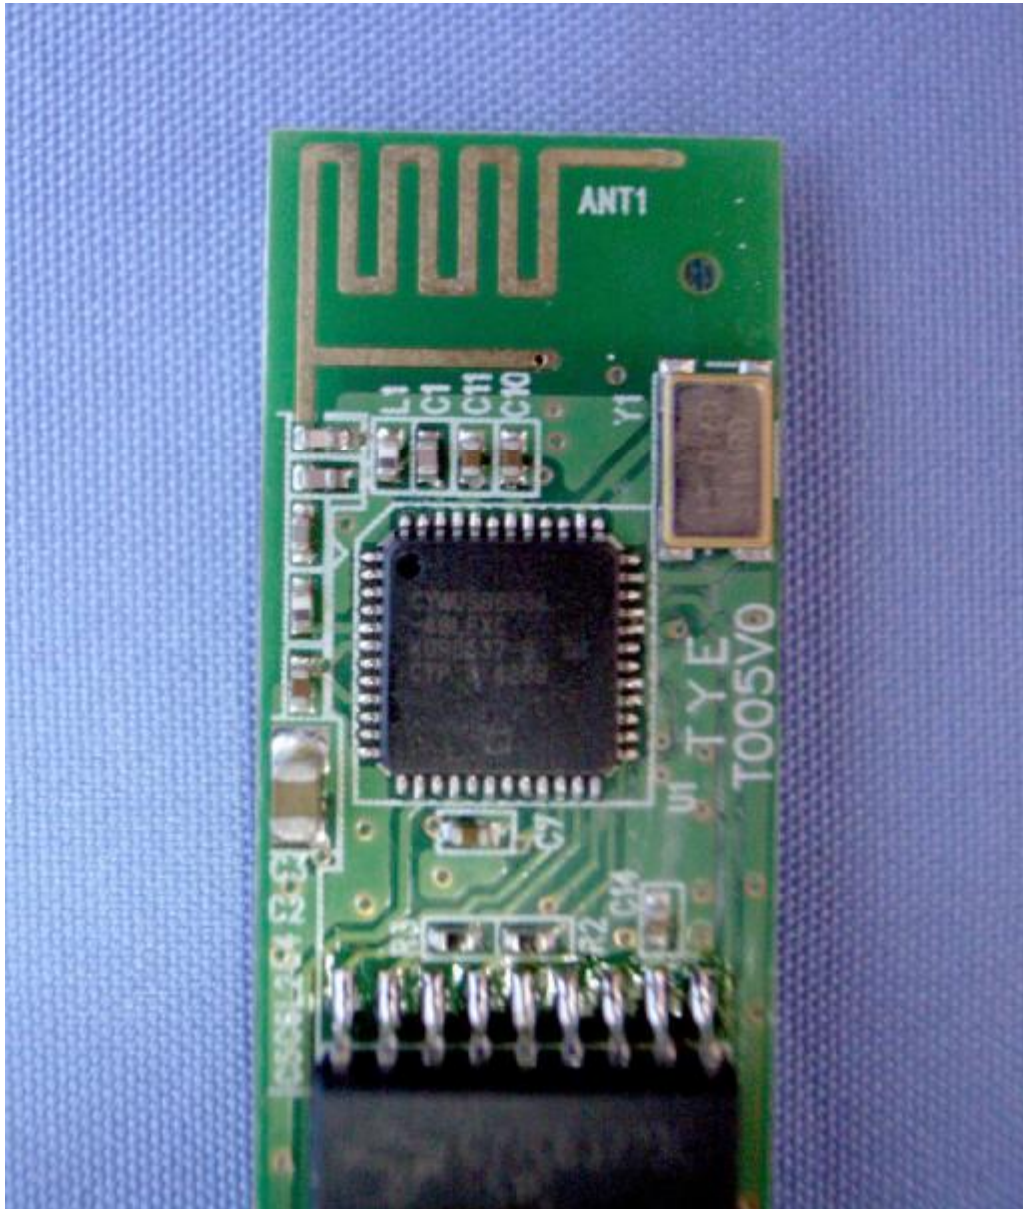

(21) EUT Photo

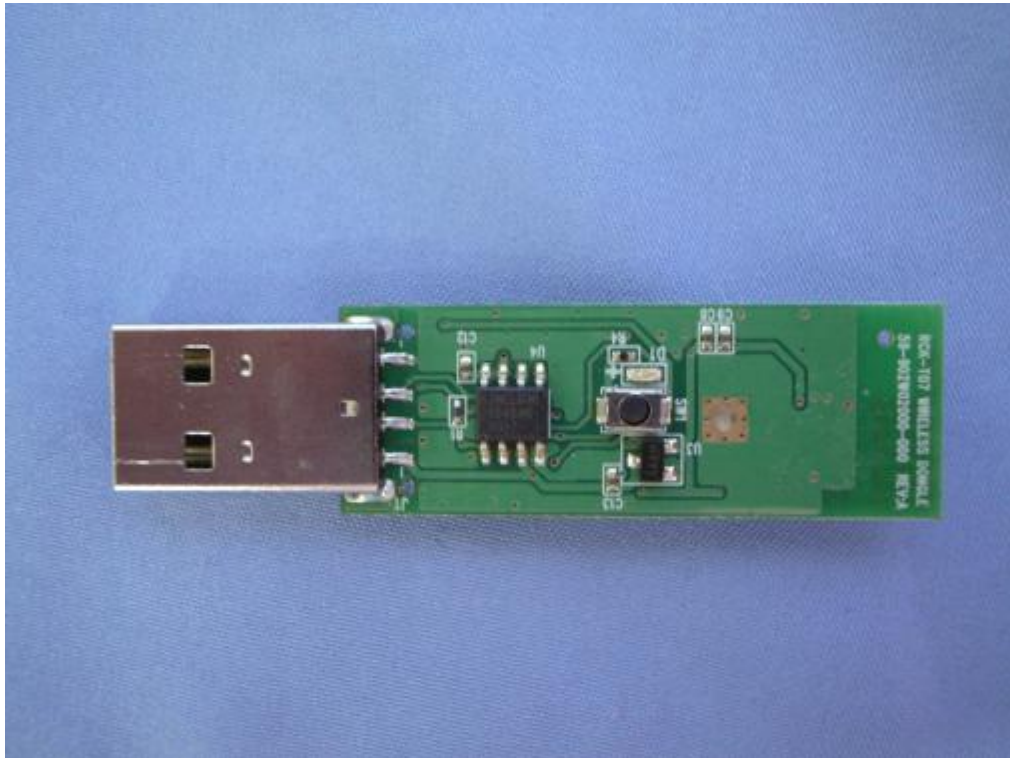

(22) EUT Photo

